



薄膜电容器简介 General Information		
薄膜电容器的标准	Film capacitors standards	
术语	Terminologies	
结构	Construction	
典型特性、应用、以及特性曲线	Typical Properties, Applications and Typical graphs	
使用注意事项	Application notes	
绿色产品	Green products	
订购须知	Purchase specification	
引线式产品的包装方式	Packing for tinned-wire type capacitors	
SMD产品外形图和编带包装说明	Outline drawing and taping packaging for SMD	
电容器编码说明	Part number system	
表面安装电容器 SMD capacitor		
C51 (CLN51)	金属化聚萘乙酯膜表面安装电容器 Metallized polyethylene naphthalate film surface mounted capacitor (Stacked version)	
聚萘乙酯膜电容器 Polyethylene naphthalate capacitors		
C91 (CLN21)	金属化聚萘乙酯膜高温电容器 (浸渍型) Metallized polyethylene naphthalate film high temperature capacitor (Dipped)	
C92	无外封装金属化聚萘乙酯膜叠片式电容器 Metallized polyethylene naphthalate film capacitor (Stacked version, uncoated)	
聚酯膜电容器 Polyester capacitors		
C24 (CL23B)	塑料外壳金属化聚酯膜叠片式电容器 (P=5.0mm) Metallized polyester film capacitor (Stacked version, box-type)	
C25 (CL25)	无外封装金属化聚酯膜叠片式电容器 Metallized polyester film capacitor (Stacked version, uncoated)	
C28	金属化聚酯膜叠片式电容器 (P=5.0/7.5mm) Metallized polyester film capacitor (Stacked version, Dipped)	
C21 (CL21)	金属化聚酯膜电容器 (浸渍型) Metallized polyester film capacitor (Dipped)	
C23 (CL23)	塑料外壳金属化聚酯膜电容器 Metallized polyester film capacitor (Box-type)	
C22 (CL21X)	聚酯膜电容器 (浸渍型) (DC-filter) Metallized polyester film capacitor (Dipped)	
C20 (CL20)	轴向金属化聚酯膜电容器 Metallized polyester film capacitor (Axial-type)	



聚丙烯膜电容器 Polypropylene capacitors

C31 (CBB21)	金属化聚丙烯膜电容器 (浸渍型) Metallized polypropylene film capacitor(Dipped)	
C32 (MKP21)	金属化聚丙烯膜电容器 Metallized polypropylene film capacitor(Box-type)	
C33 (MKP23)	金属化聚丙烯膜电容器 (高温) Metallized polypropylene film capacitor (Box-type, high temperature)	
C82 (MMKP82)	塑料外壳双面金属化聚丙烯膜电容器 Double sided metallized polypropylene film capacitor (Box-type)	
C84 (MMKP84)	塑料外壳双面金属化聚丙烯膜电容器 (高压高频) Double sided metallized polypropylene film capacitor (High voltage&frequency, box-type)	
C35 (MKP25)	金属化聚丙烯膜电容器 (DC-filter) Metallized polypropylene film capacitor (Box-type)	
C37	金属化聚丙烯膜电容器 (DC-filter) Metallized polypropylene film capacitor (Dipped)	
C14 (CBB81)	高压金属化聚丙烯膜电容器 (浸渍型) High-voltage metallized polypropylene film capacitor (Dipped)	
C13 (CBB13)	无感箔式聚丙烯膜电容器 (浸渍型) Non-inductive polypropylene film/foil capacitor (Dipped)	
C30 (CBB20)	轴向金属化聚丙烯膜电容器 Metallized polypropylene film capacitor (Axial-type)	

抑制电源电磁干扰 Interference suppression capacitors

MKP62 Code:C42	金属化聚丙烯膜抗干扰电容器 (X2类) Metallized polypropylene film interference suppression capacitor (class X2)	
MKP62+R Code:C4R	金属化聚丙烯膜抗干扰电容器(带放电电阻, X2类) Metallized polypropylene film Interference Suppression capacitor with discharge resistor (Class X2)	
MKP61R Code:C40	金属化聚丙烯膜抗干扰阻容模块 (X2类) Metallized polypropylene film interference suppression RC-unit (class X2)	
MKP64 Code:C44	金属化聚丙烯膜抗干扰电容器 (X1类,330Vac) Metallized polypropylene film interference suppression capacitor (class X1)	
MKP65 Code:C45	金属化聚丙烯膜抗干扰电容器 (X1类, 440Vac) Metallized polypropylene film interference suppression capacitor (class X1)	
MKP66 Code:C46	金属化聚丙烯膜抗干扰电容器 (X1类,760Vac) Metallized polypropylene film interference suppression capacitor(class X1)	
MKP63 Code:C43	金属化聚丙烯膜抗干扰电容器 (Y2类) Metallized polypropylene film interference suppression capacitor (class Y2)	
MKP67 Code:C47	金属化聚丙烯膜抗干扰电容器 (Y1类) Metallized polypropylene film Interference Suppression capacitor (Class Y1)	



电容降压专用电容器 A.C. Capacitors for capacitive divider	
C29	电容降压专用金属化聚酯膜交流电容器 (Box-type) Metallized polyester film A.C.capacitor for capacitive divider
C23(E)	电容降压专用金属化聚酯膜交流电容器 (Box-type) Metallized polyester film A.C.capacitor for capacitive divider
C32(E)	电容降压专用金属化聚丙烯膜交流电容器 (Box-type) Metallized polypropylene film A.C. capacitor for capacitive divider
CBB62 Code:C49	电容降压专用金属化聚丙烯膜交流电容器 (Dipped) Metallized polypropylene film A.C. capacitor for capacitive divider
MKP62 Code:C42(E)	电容降压专用金属化聚丙烯膜交流电容器 (X2类, Box-type) Metallized polypropylene film A.C. capacitor for capacitive divider (Class X2)
MKP62 Code:C42(W)	金属化聚丙烯膜抗干扰电容器 (X2类, THB防潮系列) Metallized polypropylene film interference suppression capacitor (class X2, Temperature Humindity Bias (THB) series)
精密电容器 Precision capacitors	
C71 (CBB71A/B)	金属箔式聚丙烯膜精密电容器 Polypropylene film/foil precision capacitor
C72 (CBB72A/B)	金属化聚丙烯膜精密电容器 Metallized polypropylene film precision capacitor



一、电子设备用薄膜电容器的标准体系

电子设备用固定电容器的标准体系是由基础标准，总规范，分规范，空白详细规范，以及详细规范(即企业标准)组成。或者说，企业标准是按总规范和分规范的基本要求，填写空白详细规范而成。

总规范规定了分规范和详细规范中使用的标准术语、检验程序和试验方法。分规范是按电容器的介质和结构分类的，它是对该类电容器规定优先额定值和特性，并从总规范中选择适当的质量评定程序、试验和测量方法，以及给出一般性能要求。空白详细规范是分规范的一种补充文件，它规定了详细规范的格式、编排和最基本的要求。

薄膜电容器的标准体系，举例如下：

一、The standard system of fixed plastic film capacitor for use in electronic equipment

The standard system of fixed plastic film capacitor for use in electronic equipment includes the foundational standard, generic specification, sectional specification, blank detail specification and detail specification, or manufacturer specification. That is, a manufacturer specification is derived from blank detail specification according to the basic requirements of generic and sectional specifications.

Generic specification specifies the terminology, inspection procedures and test methods applied in sectional and detail specifications. Sectional specification is classified according to the specific dielectric material and construction of capacitor, it prescribes preferred rating and characteristics and to select from generic specification the appropriate quality assessment procedures, tests and measuring methods and to give general performance requirements for this type of capacitor. Blank detail specification is a supplementary document to the sectional specification and contains requirements for style, layout and minimum contents of detail specifications.

Following please find the corresponding specification lists for plastic film capacitors.

标准号 (No.)	标准 (Standards)
GB/T 2693 (IEC 60384-1)	第1部分：总规范 Part 1: Generic specification
GB/T 7332 (IEC 60384-2)	第2部分：分规范：金属化聚酯膜介质直流固定电容器 Part 2:Sectional specification: Fixed metallized polyester film D.C.capacitor
GB/T 7333 (IEC 60384-2-1)	第2部分：空白详细规范：金属化聚酯膜介质直流固定电容器 Part 2:Blank detail specification: Fixed metallized polyester film D.C. capacitor
	详细规范：Detail specification for C25, C24, C23, C21, C22, C20, C91, C92, C28
GB/T 10188 (IEC 60384-13)	第13部分：分规范：金属箔式聚丙烯膜介质直流固定电容器 Part 13: Sectional specification: Fixed polypropylene film metal foil D.C. capacitor
GB/T 10189 (IEC 60384-13-1)	第13部分：空白详细规范：金属箔式聚丙烯膜介质直流固定电容器 Part 13:Blank detail specification: Fixed polypropylene film metal foil D.C. capacitor
	详细规范：Detail specification for C13, C71
GB/T 14472 (IEC 60384-14)	第14部分：分规范：抑制电源电磁干扰用固定电容器 Part 14: Sectional specification: Fixed capacitors for electromagnetic interference suppression and connection to the supply mains
GB/T 14473 (IEC 60384-14-1)	第14部分：空白详细规范：抑制电源电磁干扰用固定电容器 Part 14:Blank detail specification: Fixed capacitors for electromagnetic interference suppression and connection to the supply mains
	详细规范：Detail specification for MKP62, MKP63, MKP64, MKP65, MKP66, MKP67, MKP61R
GB/T 10190 (IEC 60384-16)	第16部分：分规范：金属化聚丙烯膜介质直流固定电容器 Part 16: Sectional specification: Fixed metallized polypropylene film D.C. capacitor
GB/T 10191 (IEC 60384-16-1)	第16部分：空白详细规范：金属化聚丙烯膜介质直流固定电容器 Part 16: Blank detail specification: Fixed metallized polypropylene film D.C. capacitor
	详细规范：Detail specification for C30, C72, C35, C82, C32, C37



Guang Zhou Nan Cai Electronic CO.,LTD.

<http://www.cznc.com>

GB/T 14579 (IEC 60384-17)	第17部分：分规范：金属化聚丙烯膜介质交流和脉冲固定电容器 Part 17: Sectional specification: Fixed metallized polypropylene film A.C. and pulse capacitor
GB/T 14580 (IEC 60384-17-1)	第17部分：空白详细规范：金属化聚丙烯膜介质交流和脉冲固定电容器 Part 17: Blank detail specification: Fixed metallized polypropylene film A.C. and pulse capacitor
	详细规范：Detail specification for C84, C14, C31, C33
IEC 60384-23	第23部分：分规范：金属化聚萘乙酯膜介质表面安装直流固定电容器 Part 23: Sectional specification: Fixed metallized polyethylene naphthalate film dielectric surface mounted D.C. capacitor
IEC 60384-23-1	第23部分：空白详细规范：金属化聚萘乙酯膜介质表面安装直流固定电容器 Part 23: Blank detail specification: Fixed metallized polyethylene naphthalate film dielectric surface mounted D.C. capacitor
	详细规范：Detail specification for C51



二、一些常用的标准术语

1、上限类别温度

电容器设计所确定的能连续工作的最高环境温度。

2、下限类别温度

电容器设计所确定的能连续工作的最低环境温度。

3、额定温度

可以连续施加额定电压的最高环境温度。

4、额定电压(U_R)

在下限类别温度和额定温度之间的任一温度下，可以连续施加在电容器上的最大直流电压或脉冲电压的峰值。

5、类别电压(U_C)


电容器在上限类别温度下可以连续施加在电容器上的最高电压。

6、温度降额电压

温度降额电压是在额定温度和上限类别温度之间的任一温度下，可以连续施加在电容器上的最高电压。

7、气候类别

电容器所属的气候类别用斜线分隔的三个数来表示
(IEC 60068-1:如:55/100/56)。

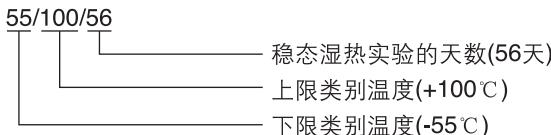

8、损耗角正切($\tan \delta$)

在规定频率的正弦波电压作用下，电容器的损耗功率除以电容器的无功功率。

二、Terminologies

1. Upper Category Temperature

The highest environmental temperature determined by capacitors design and in which capacitor may continuously work.

2. Lower Category Temperature

The lowest environmental temperature determined by capacitors design and in which capacitor may continuously work.

3. Rated Temperature

The highest environmental temperature in which capacitor applied continuously with the rated voltage.

4. Rate Voltage (U_R)

The maximum D.C. voltage or peak value of pulse voltage that can be applied continuously to capacitor at any temperature between lower category temperature and rated temperature.

5. Category Voltage (U_C)


The maximum voltage that can be applied continuously to capacitor at upper category temperature.

6. Temperature Derated Voltage

The maximum voltage that can be applied continuously to capacitor at any temperature between rated temperature and upper category temperature.

7. Climatic category

The climatic category which the capacitor belongs to is expressed in three numbers separated by slashes,(IEC 60068-1:example 55/100/56).

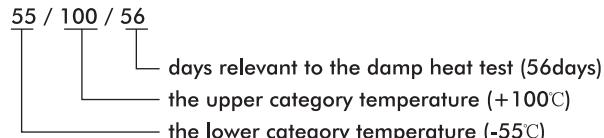

8. Dissipation factor ($\tan \delta$)

The dissipation factor is ratio between reactive power of the impedance of the capacitor and effective power when capacitor is submitted to a sinusoidal voltage of specified frequency.



9、容量温度系数(a)

电容器在规定的温度范围内容量随温度的变化率。通常以20℃时电容量为参考，用百万分之一每摄氏度（ $10^{-6}/^{\circ}\text{C}$ ）表示（ $10^{-6}/^{\circ}\text{C}=1\text{ppm}/^{\circ}\text{C}$ ）。

$$a_i = \frac{C_i - C_o}{C_o(T_i - T_o)}$$

C_i: 电容器在温度T_i时容量

C_o: 电容器在T_o(20 ± 2)℃时的容量

9. Temperature coefficient of capacitance(a)

The change rate of capacitance with temperature measured over a specified range of temperature. It is normally expressed in parts per million per Celsius degree ($10^{-6}/^{\circ}\text{C}$) and referred to 20°C.

$$a_i = \frac{C_i - C_o}{C_o(T_i - T_o)}$$

C_i: Capacitance at temperature T_i.

C_o: Capacitance at temperature T_o(20 ± 2)℃.

10、绝缘电阻(I.R.)/时间常数(t)

绝缘电阻为电容器充电一分钟后的直流电压和流经电容器的漏电流值的比值，单位为MΩ。时间常数为绝缘电阻和电容量的乘积，通常以秒表示，公式如下：

$$t[\text{s}] = I.R. [\text{M}\Omega] \times C[\mu\text{F}]$$

一般情况下，绝缘电阻用于描述小容量电容器的绝缘特性，时间常数用于描述大容量(如： $C_R > 0.33\mu\text{F}$)电容器的绝缘特性。

10. Insulation resistance(I.R.) / Time Constant (t)

The insulation resistance is the ratio between an applied D.C. voltage and the resulting leakage current after a minute of charge. It is expressed in MΩ. The time constant is expressed in seconds with the following formula:

$$t[\text{s}] = I.R. [\text{M}\Omega] \times C[\mu\text{F}]$$

In general, Insulation resistance is used for describing smaller capacitance capacitors' insulation character, Time Constant for describing larger ones' (example: $C_R > 0.33 \mu\text{F}$)

11、自愈性(仅对金属化膜电容器)

金属化膜的金属镀层是通过真空蒸发的方法将金属沉积在薄膜上，厚度只有几十个纳米，当介质上存在弱点、杂质时，局部电击穿就可能发生，电击穿处的电弧放电所产生的能量足以使电击穿点邻近处的金属镀层蒸发，使击穿点与周围极板隔开，电容器电气性能即可恢复正常。

11. Self-healing(Only for metallized film capacitor)

The metal coatings of the metallized film, which are vacuum-deposited directly onto the plastic film, have a thickness of only several tens nm. At weak points or impurities in the dielectric, a dielectric breakdown would release energy by the arc discharge in the breakdown channel is sufficient to totally evaporate the thin metal coating in the vicinity of the channel. The insulated region thus resulting around the former faulty area will cause the capacitor to regain its full operation ability.



三、薄膜电容器的基本结构 (Film capacitor basic construction):

电容器结构示意图 (Different capacitor constructions)

C24(CI23B),C25(CL25) C91(CLN21),C21(CL21) C20(CL20),C51(CLN51) C22(CL21X),C23(CL23) C30(CBB20),C53,C28,C92 C72(CBB72A/B) C31(CBB21/A/B) C42(MKP62)	C14(CBB81)	C21(CL21) C31(CBB21)	C13(CBB13) C71(CBB71A/B)	C43(MKP63)
	C82(MMKP82)	C82(MMKP82) C84(MMKP84)	C84(MMKP84)	

金属化薄膜
Metallized film

金属箔
Metal foil

双面金属化膜
Double sided metallized film

薄膜 Film

卷绕结构 (Winding construction)

卷绕式径向产品 (Wound capacitor, radial leads)	卷绕式轴向产品 (Wound capacitor, axial leads)	叠片式产品 (Stacked version capacitor)

封装方式 (Different seals)

浸渍型包封 Dipped by epoxy resin	盒式封装 Sealed in box	轴向 Axial leads	无包封 Uncoated	表面安装 SMD



四、典型特性、应用、以及特性曲线

1. 典型特性

聚酯薄膜

- ◆ 工作温度范围宽
- ◆ 介电常数大
- ◆ 自愈特性好
- ◆ 容积比大
- ◆ 稳定性好

聚丙烯薄膜的特性

- ◆ 损耗极低
- ◆ 介质吸收系数低
- ◆ 绝缘电阻高
- ◆ 频率特性好
- ◆ 自愈特性好
- ◆ 稳定性很好

2. 典型应用

聚酯薄膜电容器

- ◆ 隔直和耦合
- ◆ 旁路
- ◆ 退耦
- ◆ 滤波
- ◆ 定时
- ◆ 低脉冲电路
- ◆ 振荡电路

聚丙烯薄膜电容器

- ◆ 高频脉冲应用
- ◆ 大电流场合
- ◆ 交流场合
- ◆ 高稳定的定时场合
- ◆ 开关电源系统和彩电行业
- ◆ 照明行业
- ◆ 工控行业
- ◆ 高Q滤波

四、Typical Properties, Applications and Typical graphs

1. Typical Properties

Polyester Film

- ◆ Very wide operating temperature range
- ◆ High dielectric constant
- ◆ Excellent self-healing properties
- ◆ Very good ratio box size/capacitance
- ◆ Good stability

Polypropylene Film

- ◆ Very low dissipation factor
- ◆ Very low dielectric absorption
- ◆ Very high insulation resistance
- ◆ Good behaviour in frequency
- ◆ Excellent self-healing properties
- ◆ Very good stability

2. Typical Applications

Polyester film capacitors

- ◆ Blocking and Coupling
- ◆ By-passing
- ◆ Decoupling
- ◆ Filtering
- ◆ Timing
- ◆ Low pulse circuits
- ◆ Oscillator circuits


Polypropylene film capacitors

- ◆ High frequency,pulse applications
- ◆ High current
- ◆ A.C. applications
- ◆ Timing with high stability
- ◆ SMPS and TV set.
- ◆ Lighting
- ◆ Industrial
- ◆ Filtering high Q




3、特性曲线 Typical graphs

$\Delta C/C (\%)$

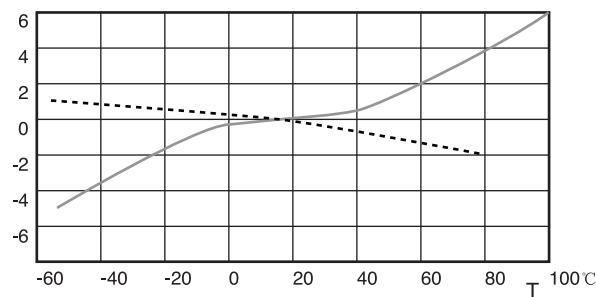


Capacitance vs. temperature at 1kHz

$\Delta C/C (\%)$

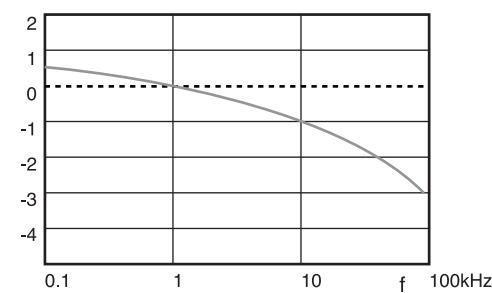


Capacitance vs. frequency (Room temperature)

$\operatorname{tg}\delta (\times 10^{-4})$

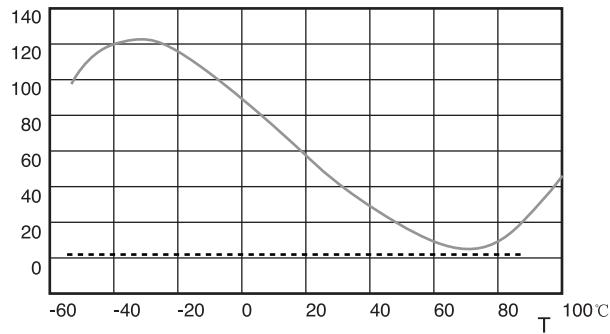


Dissipation factor vs. temperature at 1kHz

$\operatorname{tg}\delta (\times 10^{-4})$

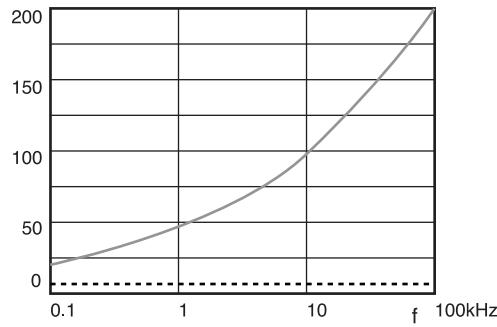

Dissipation factor vs. frequency (Room temperature)

I.R. ($M\Omega$)

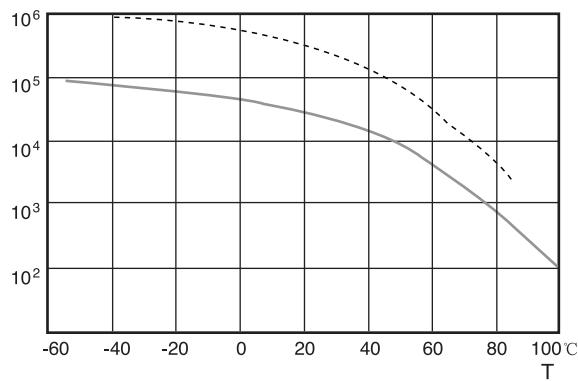

I.R. vs. temperature

----- 聚丙烯薄膜 (Polypropylene Film)
____ 聚酯薄膜 (Polyester Film)



五、使用薄膜电容器的注意事项:

1、工作电压

薄膜电容器的选用取决于施加的最高电压，并受施加的电压波形、电流波形、频率、环境温度(电容器表面温度)、电容量等因素的影响。使用前请先检查电容器两端的电压波形、电流波形和频率(在高频场合，允许电压随着电容器类型的不同而改变，详细资料请参阅说明书)是否在额定值内。C22、C35、C37系列电容不适合用于交流场合。

2、工作电流

通过电容器的脉冲(或交流)电流等于电容量C与电压上升速率的乘积，即 $I=C \times dV/dt$ 。

由于电容器存在损耗，在高频或高脉冲条件下使用时，通过电容器的脉冲(或交流)电流会使电容器自身发热而有温升，将会有热击穿(冒烟、起火)的危险。因此，电容器安全使用条件不仅受额定电压(或类别电压)的限制，而且受额定电流的限制。

工作电流被认为是由击穿模式决定的脉冲电流(峰值电流，即由 dV/dt 指标所限制的)和连续电流(以峰峰值或有效值表示)组成，当使用时，需确认这两个电流都在允许范围之内。

在高频或高脉冲条件下使用的电容器，我们推荐聚丙烯膜电容器或C24叠片式电容器。

3、各种波形的有效值换算关系

不同的波形有效值按下面的公式计算。

种类(type)	1	2	3	4
波形(waveform)				
有效值(rms)	$E/\sqrt{2}$	$E/\sqrt{2}$	$E\sqrt{t/(2T)}$	$E/\sqrt{3}$

种类(type)	5	6	7	8
波形(waveform)				
有效值(rms)	$E\sqrt{t/(3T)}$	E	$E\sqrt{t/T}$	$\sqrt{\frac{t}{2T}(E_1^2+E_2^2+E_3^2+E_4^2)}$

五、Caution items in using plastic film capacitors

1. Operation voltage

The plastic film capacitor varies in the maximum applicable voltage depending on the applied voltage waveform, current waveform, frequency, ambient temperature (capacitor surface temperature), capacitance value, etc. Be sure to use capacitors within the specified values by checking the voltage waveform, current waveform, and frequency applied to them (In the application of high frequency, the permissible voltage varies with the type of the capacitor. For detail see the specification). C22, C35, C37 series isn't suitable for AC applications.

2. Operating Current

The pulse (or AC) current flowing through the capacitor is expressed as: $I=C \times dV/dt$.

Due to the fact that dissipation factor of the capacitor will generate the internal heat under the application of high frequency or high pulse current, temperature rise in it will occur and may cause deterioration of with standing voltage, even lead to break down (smoking or firing). Therefore, the safety use of capacitor must be within the rated voltage(or category voltage)and the permissible current.

The operating current must be considered by dividing into pulse current(peak current)and continuous current (rms current) depending on the break down mode, and when using, should make sure the both currents are within the permissible values.

Under the application of high frequency or high pulse ,we recommend to use the polypropylene film capacitor or C24 stacked capacitor.

3. Calculation of rms in various waveforms

In each waveform, calculate the rms value in the following formula.



4、抑制电源电磁干扰用电容器

4.1 当在电源跨线电路中使用电容器来消除噪音时，不仅仅只有正常电压，还会有异常脉冲电压(如闪电)发生，这可能会导致电容器冒烟或者起火。所以，跨线电容器其安全标准在不同国家有严格规定。请使用经过安全认证型电容器。

不允许将直流电容器用作跨线电容器。

4.2 X类抑制电源电磁干扰用电容器

适用于在电容器失效时不会导致电击危险的场合，分为X1、X2、X3三个类别(参见下表)。

4.3 Y类抑制电源电磁干扰用电容器

适用于在电容器失效时会导致电击危险的场合，分为Y1、Y2、Y3、Y4等四个类别(参见下表)。

4. Capacitor for electromagnetic interference suppression of AC power supply

4.1 When using a capacitor across-the-line as means for prevention of noise, not only the supply voltage is always applied, but also abnormal surge such as lighting is applied, which may lead to smoking or firing. Therefore, the across-the-line capacitor is strictly regulated in safety standard in each country. Please use those approved products, which conform to corresponding safety standards of different countries. The DC capacitor will not be used in across-in-line circuit.

4.2 Capacitor for electromagnetic interference suppression of AC power supply (Class X)

It is suitable for being used in situation where failure of the capacitor could not lead to danger of electric shock, classified as class X1,X2 and X3(refer to the table below).

4.3 Capacitor for electromagnetic interference suppression of AC power supply (Class Y)

It is suitable for being used in situation where failure of the capacitor could lead to danger of electric shock, classified as class Y1,Y2,Y3 and Y4(refer to the table below).

类别 (Class)	使用时的峰值脉冲电压 kV Peak pulse voltage in service(kV)	应用 Application	耐久性实验前施加的峰值脉冲电压 Up(kV) Peak impulse voltage Up before endurance test(kV)
X1	> 2.5, < 4.0	高脉冲应用 High pulse Application	$C_R \leq 1.0\mu F, 4.0$ $C_R > 1.0\mu F, 4/\sqrt{C_R}$
X2	≤ 2.5	一般用途 General purpose	$C_R \leq 1.0\mu F, 2.5$ $C_R > 1.0\mu F, 2.5/\sqrt{C_R}$
X3	≤ 1.2	一般用途 General purpose	---

类别 (Class)	额定电压 (Vac) Rated Voltage(Vac)	耐久性实验前施加的峰值脉冲电压 Up(kV) Peak impulse voltage Up before endurance test(kV)
Y1	≤ 500	8.0
Y2	> 150, ≤ 300	5.0
Y3	≥ 150, ≤ 250	----
Y4	< 150	2.5

类别 (Class)	额定电压 (Vac) Rated Voltage(Vac)	耐电压 Voltage Proof	
		引线之间 Terminal to terminal	极壳之间 Terminal to case
X1、X2、X3	≤ 760	4.3 U _R (d.c.)	2 U _R + 1 500 V (a.c.) with a minimum of 2 000 V (a.c.)
Y1	≤ 500	4 000 V (a.c.)	4 000 V (a.c.)
Y2	≥ 150, < 300	1 500 V (a.c.) ¹⁾	2 U _R + 1 500 V (a.c.) with a minimum of 2 000 V (a.c.)
Y3	≥ 150, < 250		
Y4	< 150	900 V (a.c.) ¹⁾	900 V (a.c.) ¹⁾

1)Y2类、Y3类和Y4类电容器的逐批试验，交流试验电压可以用规定交流电压1.5倍的直流电压代替。

For lot-by-lot tests of Class Y2-, Y3- and Y4-capacitors, the a.c. test voltage may be replaced by a d.c. voltage of 1.5 times the prescribed a.c. voltage

5、电容器充放电

由于电容器充放电电流取决于电容量和电压上升速率的乘积，即使是低电压充放电，也可能产生大的瞬间充放电电流，这可能会导致电容器性能的损害，比如说短路或开路。当进行充放电时，请串联一个 $20\Omega/V \sim 1000\Omega/V$ 或更高的限流电阻，将充放电电流限制在规定的范围内。

当多个薄膜电容器并联进行耐电压测试或寿命测试时，请为每个电容器串联一个 $20\Omega/V \sim 1000\Omega/V$ 或更高的限流电阻。详见电容器标准。

6、因薄膜振动产生的翁鸣声

电容器的嗡鸣声是由于电容器薄膜受到两电极间库仑力的作用，产生的振动而发出的声音，施加的电压和频率波形失真越严重，所产生的嗡鸣声越大。但这种嗡鸣声对电容器不会产生任何破坏作用。

7、表面温升(ΔT)

7.1 当电容器用于交流及脉冲场合时，流经电容器的电流使其发热，如果发热量过大，会导致电容器短路甚至燃烧。所以流经电容器的电流不能超过产品目录所规定的最大数值及电容器在加载时监测温升就显得尤为必要。

7.2 测量电容器表面温升的方法如图1，被测试电容器必须施加工作交流、脉冲电压及工作频率。

被测试电容器
capacitor being tested

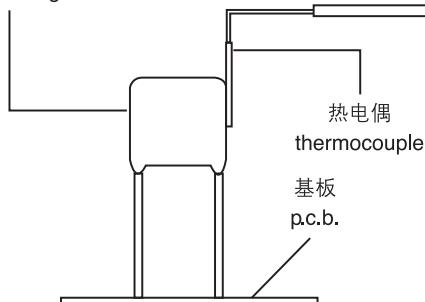


图 1
Fig.1

5. Charging and discharging

Because the charging and discharging current of capacitor is obtained by the product of voltage rise rate(dv/dt)and capacitance, low voltage charging and discharging may also cause deterioration of capacitor such as shorting and open due to sudden charging and discharging current. When charging and discharging, pass through a resistance of $20\Omega/V$ to $1000\Omega/V$ or more to limit current.

When connecting multiple film capacitors in parallel in withstand voltage test or life test, connect a resistance of $20\Omega/V$ to $1000\Omega/V$ or more in series to each capacitor.(For detail see the specification)


6. Buzzing noise

Any buzzing noise produced by capacitor is caused by the vibration of the film due to the coulomb force that is generated between the electrodes with opposite poles.If the wave-form with a high distortion rate or frequency is applied across the capacitor,the buzzing noise will become louder.But the buzzing noise is of no damage to capacitor.

7. Surface overtemperature (ΔT)


7.1 When capacitor is used in A.C. or pulse applications the current that flows through the capacitor makes it heat up. If the capacitor heats up too much it might deteriorate causing a short circuit or fire. It is essential that the limits described in the catalogue are not exceeded and that a temperature check on the capacitor is made whenever it is under load.

7.2 Method for determining the surface overtemperature of the capacitor is showed in fig.1. The capacitor being tested must be supplied by the working AC or pulse voltage and frequency.

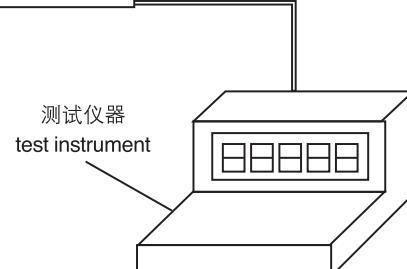



7.3、各型号电容表面允许的最大温升 Maximum self temperature rise for all series.

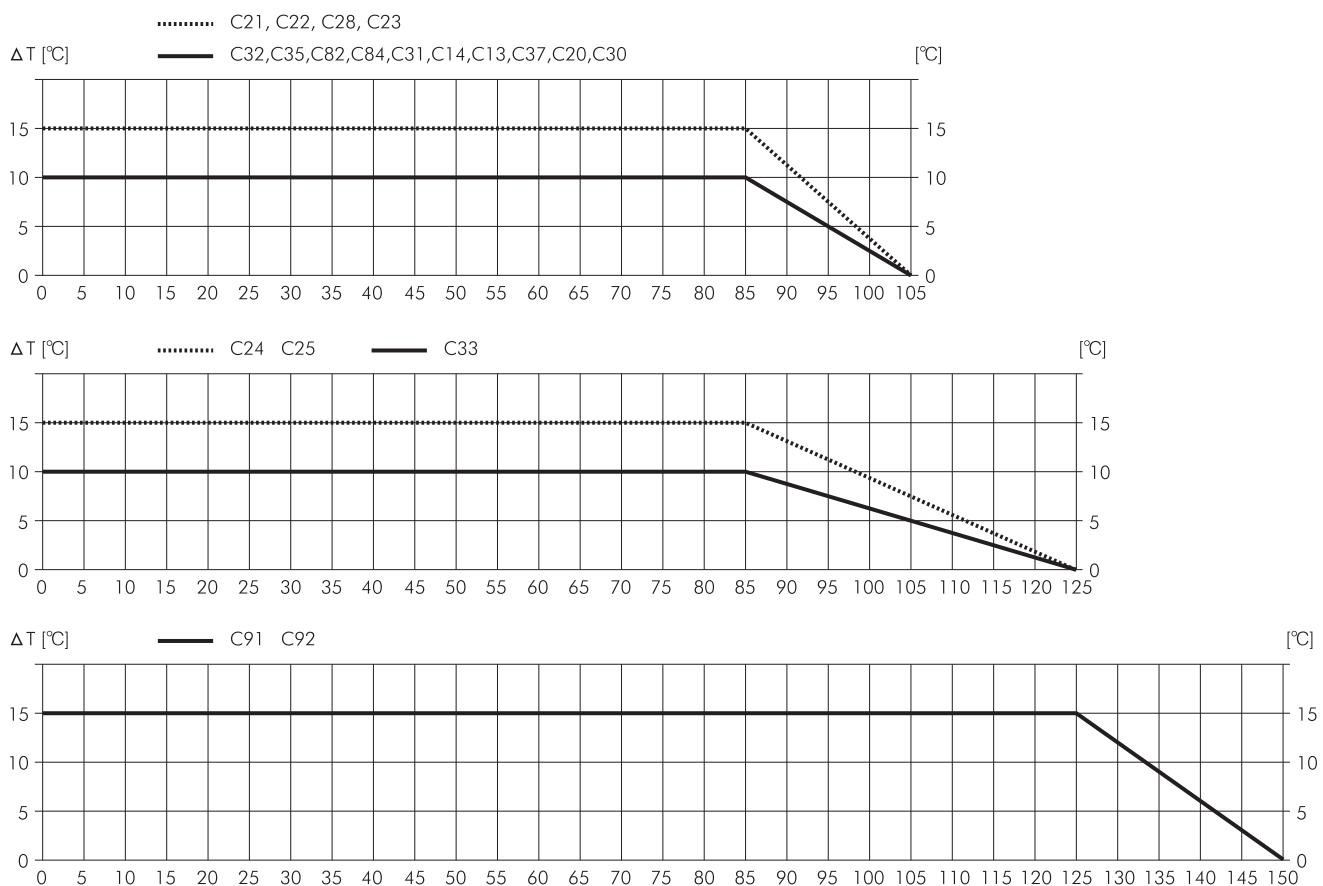

注：如果有超出要求的请联系我们的技术工程师。

Note: If you need the temperature more than above, please contact our engineers.

8、阻燃性

尽管在薄膜电容器外封装中使用了耐火性阻燃材料—阻燃环氧树脂或塑壳，但外部的持续高温或火焰仍可使电容器芯子变形而产生外封装破裂，导致电容器芯子熔化或燃烧。

8. Passive flammability

Although flame retardation epoxy resin or plastic case is used in the coating or encapsulating of plastic film capacitor, continuous outer high temperature or firing will break the coating layer or plastic case of the capacitor ,and may lead to melting and firing of the capacitor element.

有阻燃等级 (Category of flammability)	针对电容器体积范围(mm^3)				最大燃烧时间 (s)
	体积 < 250	250 < 体积 < 500	500 < 体积 < 1750	1750 < 体积	
A	15	30	60	120	3
B	10	20	30	60	10
C	5	10	20	30	30

9、几种特殊工作环境

9.1 高湿环境

如果长时间使用在高湿环境下，电容器可能会吸收潮气、电极被氧化，导致电容器损坏。如果在AC条件下使用，高湿环境将会加剧电晕的影响，从而引起电容值下降、损耗值增加。在AC应用情况下，如果超出下表的条件，影响将会更严重，对于详细的信息请联系我们的技术工程师。

9. Special working conditions

9.1 Humid ambient.

If used for a long time in a humid ambient, the capacitor might absorb humidity and oxidise the electrodes causing breakage of the capacitor. If case of AC application, high humidity would increase the corona effect. This phenomenon causes a drop in the capacitance value. In case of working condition in AC application more severe than following table, please contact our engineers for detailed informations.

	Working Temperature	Relative Humidity
Average for year	25°C	70%
2 weeks continuously	30°C	90%

9.2 灌胶

如果电容器有被灌树脂，下列的情况将可能会发生：

- a. 树脂里的溶剂可能会影响电容器的特性；
- b. 在聚合过程中产生的热将会损坏电容器。

9.3 点胶固化


我们建议SMD产品点胶固化后再插件，因为胶的固化温度过高可能会破坏插件电容器，对于必须在SMD的产品点胶固化前做插件的，请评估SMD产品的点胶固化温度是否适合插件产品。

10. 焊接建议

为达到更好的可焊性，我们建议遵照下列的标准。

10.1 最大焊接温度

焊接条件按下面的焊接图表：

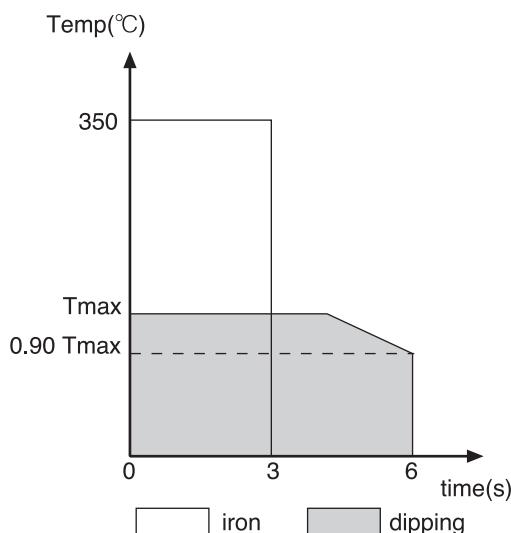

10.2 如果需要焊接两次，第二焊接必须等到电容器恢复到常温。

10.3 我们建议SMD产品点胶固化后再插件，因为胶的固化温度过高可能会破坏插件电容器，对于必须在SMD的产品点胶固化前做插件的，请评估SMD产品的点胶固化温度是否适合插件产品。

10.4 避免插件产品和SMD产品一起做回流焊接。

9.2 Resin

If the capacitor is placed in resin, the following situations might occur:

- a. The solvent contained in the resin might deteriorate the characteristics of the capacitor;
- b. The heat generated during the polymerisation might damage the capacitor.

9.3 Adhesive curing oven

Insert lead parts only after the adhesive curing process of SMD parts, because the high temperature in curing oven will damage the capacitor. If lead parts must be fixed before the SMD gluing process, please estimate if the curing temperature is suitable for lead parts.

10. Soldering suggestions

In order to obtain a good solderability, we suggest to observe the following rules.

10.1 Max soldering temperature

Solder within the conditions mentioned in the following diagram.

	Tmax	Time	Note
Pre-heating	110°C	1min	
	100°C	1min	OPP P < 7.5
Soldering	270°C	4s	
	260°C	4s	OPP P < 7.5

10.2 If re-working or dipping twice is necessary, it should be done after the capacitor returned to the normal temperature.

10.3 Insert lead parts only after the adhesive curing process of SMD parts, because the high temperature in curing oven will damage the capacitor. If lead parts must be fixed before the SMD gluing process, please estimate if the curing temperature is suitable for lead parts.

10.4 Avoid reflow soldering by combining the lead type with SMD parts.



11、贮存条件

1、由于大气中存在氢氯化物、氢硫化物、硫酸物质等，所以产品贮存在大气中，必须注意引出端的可焊性会变差。

2、产品不能暴露在高温和高湿状态，必须保存在以下环境中：(在不拆开原包装的基础上)

温度：不超过35°C

湿度：不超过80% RH

引线式产品贮存时间(从产品包装或产品本体上的日期算起)：

对于散装产品，不超过24个月。

对于径编产品，不超过12个月。

焊片产品贮存时间，不超过6个月(从发货日算起)。

3、SMD产品的贮存要求

当未打开1级MBB(Moisture Barrier Bag)，贮存在温度小于35°C，湿度小于80%RH的情况下，能够保证有12月的贮存期。

当打开MBB后，贮存在温度小于30°C，湿度小于60%RH的情况下，可以保证168小时。

如果拆开包装的未使用的剩下产品，我们建议再利用同样的MBB包装，或者控制贮存环境的湿度和温度。

六、绿色产品

RoHS符合性

在此产品目录中的，法拉公司的产品均符合RoHS指令和《电子信息产品污染控制管理办法》的要求。

七、在订购或索要样品之前，请尽可能多地提供以下信息：

1. 额定工作电压：DC, AC；
2. 电容量及电容量允许偏差：J、K、M等；
3. 最终产品种类：彩色电视机、显示器、开关电源，电子节能灯、镇流器、变频器、ADSL、UPS等等；
4. 用途或电路图：直流回路、交流脉冲回路(S校正电路、行逆程电路、尖峰吸收回路)，电源跨线噪音抑制电路、高稳定性电路、DC-link、DC-filter、降压、PFC等等；
5. 使用条件：脉冲峰值，频率，波形，电流等等；
6. 使用温度；
7. 外形尺寸：电容器本体尺寸，引出线尺寸等等；
8. 形状：包封形式(浸渍型、盒式等)，引出线(直脚、成型、编带等等)；
9. 安全性：当电容器短路或开路时对其他部件的影响，当其它部件或电路工作异常时对电容器的影响；
10. 焊接条件：SMD、引线式；
11. 安装方式：PCB板、绝缘引线等；

11. Storage conditions:

1. It must be noted that the solderability of the terminals may be deteriorated when stored in an atmosphere filled with moisture, dust, or a reactive oxidizing gas.(hydrogen chloride, hydrogen sulfide, sulfuric acid,etc.)

2. It shouldn't be located in particularly high temperature and high humidity, it must submit to the following conditions(under the unchanging primal package):

Temperature: not exceeding 35°C

Humidity: not exceeding 80% RH

Storage time for tinned lead wire: (from the date marked on the capacitor's body or the label glued to the package):

Bulk: -24 months

Taping: -12 months

Storage time for welding tabs:

from the date of consignment -6 months

3.SMD storage suggestion

When unchanging a MBB (Moisture Barrier Bag) Class 1,stored in a temperature lower than 35°C and relative humidity lower than 80%,the storage is 12 months.

After the opening of the MBB, stored in a temperature lower than 30°C and relative humidity lower than 60% , the storage is 168 hours.

If the reel is partially used, We recommends the recycle of the same MBB or a storage in areas with controlled temperature and humidity.

六、Green Products

RoHS Compliance

Faratronic products in the catalogue are RoHS Compliant.

七、When placing an order or inquiring sample, please specify the following, as much as you can.

1. Rated voltage: DC, AC.
2. Capacitance value and capacitance tolerance: J, K, M etc.
3. Finished product: Color TV, Monitor, Switching power, light, ballast, transducer, ADSL, UPS etc.
4. Application or circuit diagram: DC circuit, AC pulse circuit (S-shape correction, horizontal resonance circuit, peak absorption circuit), interface noise suppression circuit, high stability circuit DC-link, DC-filter, PFC etc.
5. Condition of operation: pulse peak, frequency, waveform, current etc.
6. Operating temperature.
7. Dimensions: body, lead space, etc.
8. Shape: enclosure(dip, case, etc), lead wire(straight, crimped, taping etc).
9. Safety: Influence to the other component, when the capacitor gets short-circuited or open. Influence to the capacitor, when the other component or the circuit works irregularly.
10. Welding condition: SMD or tinned-lead-wire type.
11. Fixed style: PCB, insulated lead wire etc.

八、引线式产品的包装方式 Packing for tinned-wire capacitors

1. 塑料外壳电容器径向编带说明 Taping specification for box-type capacitor

■ 外形图 Outline Drawing

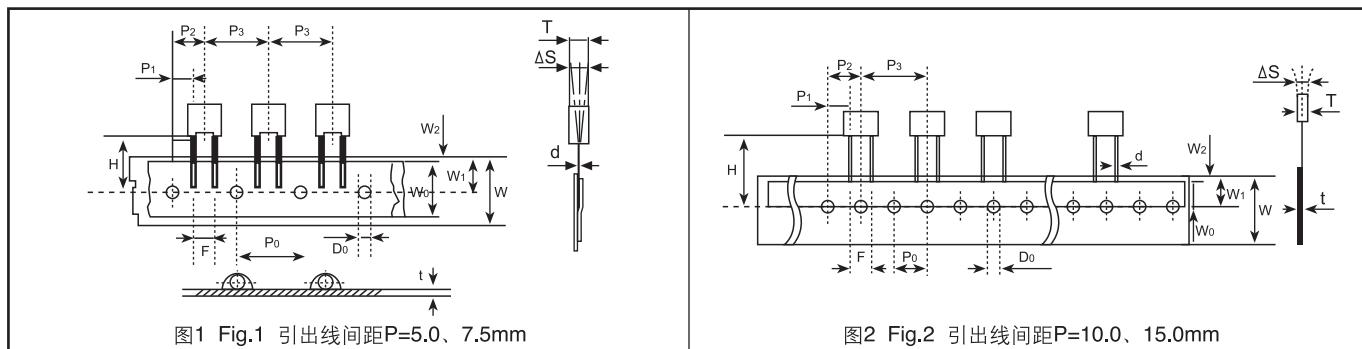


图1 Fig.1 引出线间距P=5.0、7.5mm

图2 Fig.2 引出线间距P=10.0、15.0mm

■ 编带尺寸表 Taping Dimensions(mm)

技术指标名称	代号	尺寸				
		P=5.0	P=7.5	P=10.0	P=15.0	误差
编带类型		图1 Fig 1	图1 Fig 1	图2 Fig 2	图2 Fig 2	
Part number Digit12-15	Ammo -pack	A201	A301	A405	A605	
电容器间距	P ₃	12.7	12.7	25.4	25.4	±1.0
送带孔距	P ₀	12.7	12.7	12.7	12.7	±0.2
引出线位置	P ₁	3.85	2.6	7.7	5.2	±0.7
电容器本体位置	P ₂	6.35	6.35	12.7	12.7	±1.3
引出线间距	F**	5.0	7.5	10.0	15.0	+0.6 -0.1
电容器侧面倾斜	△s	0	0	0	0	±2.0
电容器底部至 带孔中心距离	H***	18.5	18.5	18.5	18.5	±0.5
纸带宽度	W	18.0	18.0	18.0	18.0	+1.0 -0.5
胶带纸宽度	W ₀	6min	10min	10min	10min	
送带孔位置	W ₁	9.0	9.0	9.0	9.0	±0.5
胶带纸位置	W ₂	3max	3max	3max	3max	
送带孔直径	D ₀	4.0	4.0	4.0	4.0	±0.2
编带总厚度	t	0.7	0.7	0.7	0.9	±0.2

Note: * P₀=15.0mm is also available;

* P₀=15.0mm is可行;

** F can be other lead space;

** F可以是其他间距;

*** H=16.5mm is available;

*** H=16.5mm是可行的;

If you need other taping, please contact us. 如果需要其它编带, 请联系我们。


2. 浸渍型电容器包装说明 Paking for dipped-type capacitor

2.1 浸渍型电容器引出线成型形状 Lead kinked for dipped-type capacitor

代号(Code)	I	II	III	IV	
成型形状 Forming shape					
适用范围 Applicable range		P > F		P < F	
0mm < P-F < 3mm		3mm < P-F < 8mm		3mm < F-P < 5mm	0mm < F-P < 3mm
尺寸标准 Dimension standard			A ≤ 5.0mm; B=4.5 ± 0.5mm; F允许偏差为 ± 0.8mm (The permissible tolerance of 'F' is ± 0.8mm)		

2.2 浸渍型电容器径向编带说明 Taping for dipped-type capacitor

■ 外形图 Outline Drawing

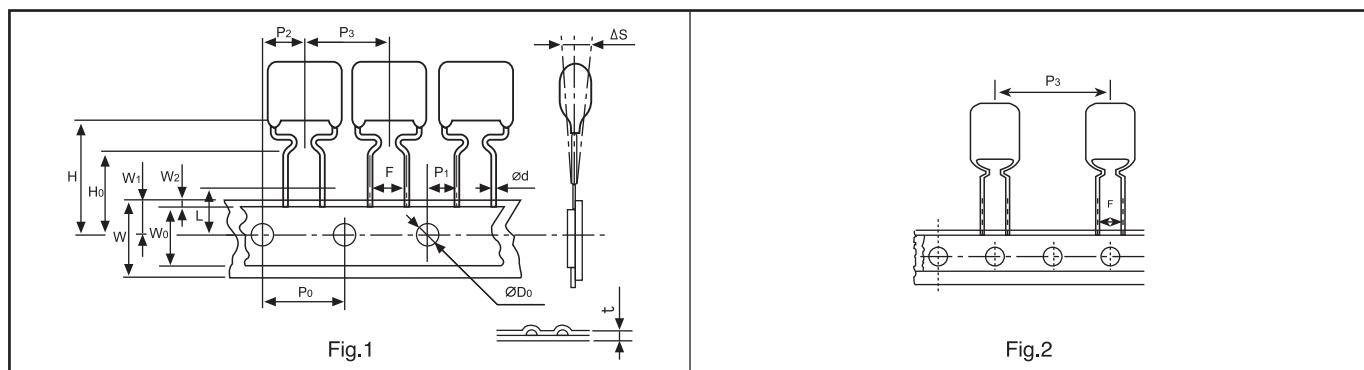

■ 编带尺寸表 Taping Dimensions(mm)

技术指标名称	代号	尺寸(mm)				
		P=5.0	P=7.5	P=10.0	P=15.0	误差
编带类型		Fig 1	Fig 1	Fig 2	Fig 2	
Part number Digit12-15	Ammo -pack	A21A	A31A	A41E	A61E	
电容器间距	P ₃	12.7	12.7	25.4	25.4	±1.0
送带孔距	P ₀	12.7	12.7	12.7	12.7	±0.3
引出线位置	P ₁	3.85	2.60	7.7	5.2	±0.7
电容器本体位置	P ₂	6.35	6.35	12.7	12.7	±1.3
成形间距	F**	5.0	7.5	10.0	15.0	+0.8 -0.2
电容器侧面倾斜	Δs	0	0	0	0	±2.0
电容器高度	H	20.0	20.0	20.0	20.0	±1.0
弯脚高度	H ₀	16.0	16.0	16.0	16.0	±0.5
纸带宽度	W	18.0	18.0	18.0	18.0	+1.0 -0.5
胶带纸宽度	W ₀	10min	10min	10min	10min	
送带孔位置	W ₁	9.0	9.0	9.0	9.0	+0.75 -0.5
胶带纸位置	W ₂	3max	3max	3max	3max	
送带孔直径	D ₀	4.0	4.0	4.0	4.0	±0.3
编带总厚度	t	0.7	0.7	0.7	0.7	±0.2

Note: * P₀=15.0mm is also available;


* P₀=15.0mm是可行的；

** F can be other lead space;

** F可以是其他间距；

3.3 径向编带包装箱尺寸


(Box size for Ammo-pack)

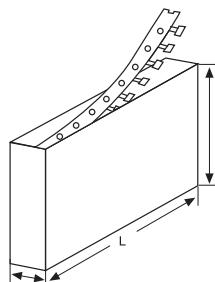

L=330 ± 3, B=48 ± 3, H=260 ± 3


3. 包装箱尺寸 Packing in bulk (mm)

3.1 散装外包装箱尺寸 (Out packing box for bulk)

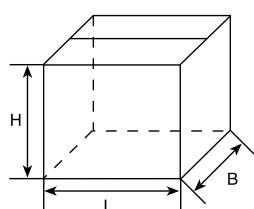

L: 375±5
B: 375±5
H: 265±5


3.2 散装内包装箱尺寸 (Inner packing box for bulk)

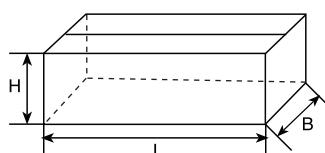


L: 355±3
B: 175±3
H: 118±3

九、表面安装电容器 SMD Capacitor

■ SMD 产品外型图 Outline drawing




■ 安装尺寸图 Layout



■ 安装尺寸表 Recommended PCB layout (mm)

尺寸代码 Dimension Code		1812	2220	2824	4030	5040	6054
产品尺寸 Dimension	L	4.8±0.3	5.9±0.3	7.3±0.4	10.5±0.4	13.0±0.4	15.5±0.4
	W	3.2±0.4	5.1±0.4	6.1±0.5	7.6±0.5	10.2±0.5	13.7±0.5
安装尺寸 Layout	A	3.0	4.6	5.7	7.4	9.6	12.6
	B	6.6	8.3	10.0	13.4	15.9	18.4
	C	1.7	2.0	2.3	2.8	3.0	3.0

■ 编带和包装 Taping and packaging(mm)

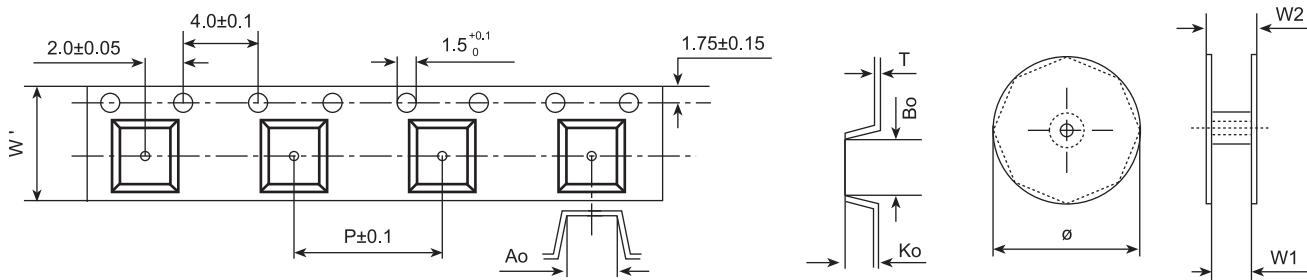

编带尺寸表 Taping dimension

尺寸 代码 Dimension Code	电容器尺寸 Cap Dimension			编带尺寸 Taping Dimension					收卷尺寸 Reel Dimension			包装数量 Quantities		
	L mm	W mm	载带代码 Carrier tape Code	Ao mm	Bo mm	Ko mm	W' mm	P mm	T mm	Ø mm	W1 mm	W2 mm	只/卷 pcs/reel	散装(只/包) Bulk(pcs/pack)
1812	4.8	3.2	a b	3.8	5.1	2.0 2.6	12	8	0.3	330	12	16	4 000 3 000	1 500
2220	5.9	5.1	a b c	5.7	6.4	2.9 3.8 4.9	12 12 16	8 8 8	0.3 0.35 0.4	330	12 12 16	16 16 20	3 000 2 250 1 750	1 500
2824	7.3	6.1	a b c	6.6	7.9	3.8 4.6 5.5	16	12	0.35 0.4 0.4	330	16	20	1 500 1 250 1 000	1 000
4030	10.5	7.6	a b c	8.4	11.0	3.8 4.8 5.8	16	12	0.35 0.4 0.4	330	16	20	1 500 1 250 1 000	1 000
5040	13.0	10.2	a b c	10.9	13.5	3.8 4.7 5.9	24	16	0.35 0.4 0.5	330	24	28	1 100 900 750	500
6054	15.5	13.7	a b c	14.4	16.0	4.3 5.1 5.8	24	20	0.4 0.4 0.5	330	24	28	800 600 600	500



十、产品编码说明 Part number system


■ 18位产品代码如下:

The 18 digits part number is formed as follow:

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
C	1	3															

第1~3位	型号代码	Digit 1 to 3	Series code
第4~5位	额定电压(参见table 2)	Digit 4 to 5	Rated voltage(refer to table 2)
第6~8位	标称容量(按照JIS标准) $103=10 \times 10^3 \text{ pF}=0.01\mu\text{F}$	Digit 6 to 8	Rated capacitance value (JIS Standard) $103=10 \times 10^3 \text{ pF}=0.01\mu\text{F}$
第9位	容量偏差 $G= \pm 2\%$, $H= \pm 3\%$, $J= \pm 5\%$ $K= \pm 10\%$, $M= \pm 20\%$	Digit 9	Capacitance tolerance $G= \pm 2\%$, $H= \pm 3\%$, $J= \pm 5\%$ $K= \pm 10\%$, $M= \pm 20\%$
第10位	引线脚距(参见table 3) (引线式产品)	Digit 10	Pitch(refer to table 3) (for tinned-lead-wire type)
第10位	对于SMD是包装代码, 参照其系列说明	Digit 10	Packaging code(related to SMD series)
第11位	内部特征码	Digit 11	Internal use
第12~15位	引线加工和包装代码(参见table 4) (引线式产品)	Digit 12 to 15	Lead form and packaging code(refer to table 4) (for tinned-lead-wire type)
第12~15位	对于SMD是外形尺寸代码, 参照其系列说明	Digit 12 to 15	Dimension code(related to SMD series)
第16~18位	内部特征码	Digit 16 to 18	Internal use

■ 例如 for example

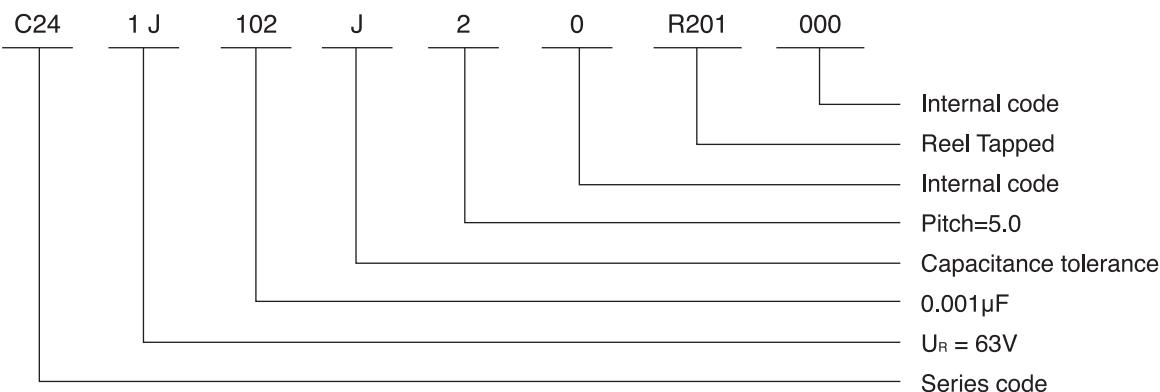



■ Table1 型号代码对照 Series Code

代码 Code	型号 Type	代码 Code	型号 Type	代码 Code	型号 Type	代码 Code	型号 Type
C13	CBB13	C25	CL25	C42	MKP62	C71	CBB71A/B
C14	CBB81	C30	CBB20	C43	MKP63	C72	CBB72A/B
C20	CL20	C31	CBB21	C44	MKP64	C82	MMKP82
C21	CL21	C32	MKP21	C45	MKP65	C84	MMKP84
C22	CL21X	C33	MKP23	C46	MKP66	C91	CLN21
C23	CL23	C35	MKP25	C47	MKP67	C4R	MKP62+R
C24	CL23B	C40	MKP61R	C51	CLN51		

■ Table2 额定电压代码 Rated voltage code

	A	B	C	D	E	F	G	H	J	K	L	M	N
1			16	20				50	63			1100	
2	100	125	160	200	250	315	400	500	630	800	120		
3	1000	1250	1600	2000	2500	3150	4000	5000	6300	8000	1200	1400	
	P	Q	R	S	T	U	V	W	X	Y			
1	240	300	330	440	540	600	700	850	900				
2	275	305	350	450	520		760						
3	280	310		480									

说明：参考日本JIS标准，字母加数字表示交流，数字加字母表示直流，例如A2表示100Vac，2A表示100Vdc

Exemplation: Refer to JIS standard, Letter and then number indicate AC, but number and then Letter indicate DC,
for example, 2A indicate 100Vdc, A2 indicate 100Vac.

■ Table3 脚距代码 Pitch code

Code	0	2	3	4	5	6	8	9	A	B
Pitch	axial	5.0	7.5	10	12.5	15	20	22.5	25.0	27.5
Code	C	D	F	H	M	R				
Pitch	30	32.5	37.5	42.5	52.5	62.5				

(以上表格中不包括CBB13精密电容的脚距代码)

(The pitch code of CBB13 precision cap aren't included in the above table.)

■ Table4 引线加工和包装代码 Lead form and packaging code

第12位 Digit 12		第13位 Digit 13		第14位 Digit 14		第15位 Digit 15				
代码 Code	说明 explanation	代码 Code	说明 explanation	代码 Code	说明 explanation	代码 Code	说明 explanation			
A	弹带包装 ammo-pack	2 3 4 6	F=5.0mm F=7.5mm F=10.0mm F=15.0mm	0 1	表示直脚 straight 表示弯脚 kinked	1 5 A E	产品在连续的两个载带孔之间 each cap. between two consecutive holes P3=12.7mm,H=18.5mm (For pitch=5.0/7.5mm)			
							P3=25.4mm;H=18.5mm (For pitch=10.0/15mm)			
							产品在连续的两个载带孔之间 each cap. among two consecutive holes P3=12.7mm,H=20.0mm (For pitch=5.0/7.5mm)			
							P3=25.4mm;H=20.0mm (For pitch=10.0/15.0mm)			
							(Detail information refer to pag 17 and 18)			
F	引线成型 lead kinked (in bulk)	2 3 4 6	F=5.0mm F=7.5mm F=10.0mm F=15.0mm	0	B=4.5mm (the length of B)	0	B的长度偏差 ± 0.5mm B Length tolerance ± 0.5mm (refer to pag15)			
C or Y	散装切脚 straight lead or cut lead (in bulk)	代码 Code	说明 explanation				引线长度偏差 ± 0.5mm或标准长度 Length tolerance ± 0.5mm(or standard length)			
		00 45	标准的引线长度(18mm min) standard lead length 引线长度4.5mm lead length 4.5mm							