



Guang Zhou Nan Cai Electronic CO.,LTD.
<http://www.cgznc.com>



規格承認書

(SPECIFICATION FOR APPROVAL)

File No.: Q/BH .TS16949.13TECH1303

Product Name: DC-Link capacitor for PCB

Product Type: C3D(PCB DC-Link)

Product Code: C3D


Customer:

Customer Code:

Issue Date: (V3.0)

PCB用DC-Link电容器 DC-Link Capacitor for PCB

■ 外形图 Outline Drawing

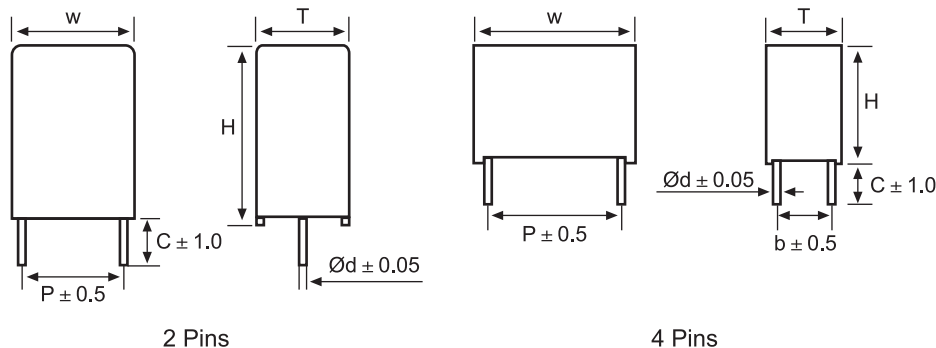

■ 特点

- 金属化聚丙烯膜结构
- 良好的电气性能
- 塑料外壳封装(UL94 V-0), 树脂填充
- 高性能直流滤波应用场合
(如: 变频器、工业和高端电源、太阳能逆变器等)

■ Features

- Metallized polypropylene structure.
- Excellent electric property.
- Plastic case (UL94 V-0), Filled with resin.
- High performance DC filtering applications
(i.e. Frequency converters, Industrial and high-end power supplies and Solar inverters)

■ 安全认证 Safety Approvals

•		UL(美国)	UL 810 (construction only) 证书号(Certificate No.): E256238, CCN: CZDS2
---	---	--------	---

■ 技术要求 Specifications

引用标准 Reference Standard	IEC 61071
气候类别 Climatic Category	40/105/56
工作温度(外壳) Operating temperature (case)	-40℃~105℃ (+85℃ to +105℃: decreasing factor 1.35% per °C for U _{N,85℃})
额定电压 U _{N,70℃}	500Vdc, 600Vdc, 800Vdc, 900Vdc, 1 000Vdc, 1 100Vdc, 1 200Vdc
容量偏差 Capacitance Tolerance	J (± 5%), K(± 10%), M(± 20%)
耐电压 Voltage Proof	1.5U _N (10s)
绝缘电阻 Insulation Resistance(IR × C _N)	≥ 10 000s (20℃, 100Vdc, 1min)
自感 (Ls) Self Inductance(Ls)	< 1nH per mm of lead spacing
最大峰值电流 (A) Maximum peak current(A)	I _{P,max} =C _N · dV/dt
工作寿命 Operation life time	100 000h at U _N and 70℃



C3D

产品编码说明 Part number system

■ 18位产品代码如下:

The 18 digits part number is formed as follow:

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
C	3	D															

第1~3位	型号代码 C3D	Digit 1 to 3	Series code C3D
第4~5位	直流额定电压 2H=500V 1U=600V 2K=800V 1X=900V 3A=1 000V 1M=1 100V 3L=1 200V	Digit 4 to 5	DC rated voltage 2H=500V 1U=600V 2K=800V 1X=900V 3A=1 000V 1M=1 100V 3L=1 200V
第6~8位	标称容量 举例: 105=10 x 10 ⁵ pF=1.0μF	Digit 6 to 8	Rated capacitance value For example: 105=10 x 10 ⁵ pF=1.0μF
第9位	容量等级 J= ± 5%, K= ± 10%, M= ± 20%	Digit 9	Capacitance tolerance J= ± 5%, K= ± 10%, M= ± 20%
第10位	引线间距 P B=27.5mm C=30.0mm F=37.5mm M=52.5mm	Digit 10	Pitch P B=27.5mm C=30.0mm F=37.5mm M=52.5mm
第11位	内部特征码	Digit 11	Internal use
第12~15位	引线加工和包装码	Digit 12 to 15	Lead form and packaging code
第16~18位	内部特征码	Digit 16 to 18	Internal use

■ Table 1 引线加工和包装代码 Lead form and packaging code

第12位 Digit 12		第13位和第14位 Digit 13 and Digit 14		第15位 Digit 15	
代码 Code	说明 explanation	代码 Code	说明 explanation	代码 Code	说明 explanation
0	2引线散装 Two pins(bulk)	C0	标准引线长度5.5mm standard lead length 5.5mm	0	引线长度偏差 ± 1.0mm Length tolerance ± 1.0mm
1	4引线散装four pins(bulk) b=10.0mm				
2	4引线散装four pins(bulk) b=12.7mm				
3	4引线散装four pins(bulk) b=20.0mm				
4	4引线散装four pins(bulk) b=15.0mm				
A	4引线散装four pins(bulk) b=20.3mm				
B	4引线散装four pins(bulk) b=10.2mm				
C	4引线散装four pins(bulk) b=5.1mm				
D	4引线散装four pins(bulk) b=15.2mm				

■ 技术参数 Technical data(mm)

U _N , 70℃: 500 Vdc, U _N , 85℃: 450 Vdc												
C _N (μF)	W ± 1.0	H ± 1.0	T ± 1.0	P ± 0.5	b ± 0.5	d ± 0.05	dV/dt (V/μs)	tg δ × (10 ⁻⁴)		ESR (mΩ)	I _{rms} (A)	Part number
								1kHz	10kHz			
5.0	32.0	20.0	11.0	27.5	--	0.8	65	10	100	8.5	5.0	C3D2H505+B00C00***
10.0	32.0	24.5	15.0	27.5	--	0.8	65	10	100	7.5	6.5	C3D2H106+B00C00***
22.0	32.0	37.0	22.0	27.5	--	0.8	65	10	100	5.0	10.0	C3D2H226+B00C00***
30.0	42.0	40.0	20.0	37.5	10.2	1.0	30	15	150	8.0	12.5	C3D2H306+F0BC00***
35.0	42.0	36.0	24.0	37.5	10.2	1.0	30	15	150	8.0	13.5	C3D2H356+F0BC00***
40.0	41.5	37.5	27.5	37.5	10.2	1.0	30	15	150	5.0	14.5	C3D2H406+F0BC00***
50.0	41.0	43.0	28.0	37.5	12.7	1.2	30	15	150	4.0	16.0	C3D2H506+F02C00***
50.0	42.0	45.0	30.0	37.5	20.3	1.2	30	15	150	4.0	16.0	C3D2H506+F0AC00***
60.0	42.0	45.0	30.0	37.5	20.3	1.2	30	15	150	3.0	16.5	C3D2H606+F0AC00***
75.0	57.0	43.5	29.5	52.5	12.7	1.2	15	35	350	5.5	16.0	C3D2H756+M02C00***
75.0	57.0	43.5	29.5	52.5	20.3	1.2	15	35	350	5.5	16.0	C3D2H756+M0AC00***
80.0	57.0	43.5	29.5	52.5	20.3	1.2	15	35	350	5.0	16.5	C3D2H806+M0AC00***
100.0	57.0	50.0	35.0	52.5	20.3	1.2	15	35	350	4.0	18.0	C3D2H107+M0AC00***
110.0	57.0	50.0	35.0	52.5	20.3	1.2	15	35	350	4.0	19.0	C3D2H117+M0AC00***

U _N , 70℃: 600 Vdc, U _N , 85℃: 500 Vdc												
C _N (μF)	W ± 1.0	H ± 1.0	T ± 1.0	P ± 0.5	b ± 0.5	d ± 0.05	dV/dt (V/μs)	tg δ × (10 ⁻⁴)		ESR (mΩ)	I _{rms} (A)	Part number
								1kHz	10kHz			
2.0	32.0	18.0	9.0	27.5	--	0.8	65	11	100	47.8	2.8	C3D1U205+B00C00***
3.0	32.0	20.0	11.0	27.5	--	0.8	65	11	100	31.8	4.1	C3D1U305+B00C00***
4.0	32.0	20.0	11.0	27.5	--	0.8	65	11	100	23.9	5.5	C3D1U405+B00C00***
5.0	32.0	22.0	13.0	27.5	--	0.8	65	11	100	19.1	6.9	C3D1U505+B00C00***
6.0	32.0	24.5	15.0	27.5	--	0.8	65	11	100	18.6	7.1	C3D1U605+B00C00***
7.0	32.0	24.5	15.0	27.5	--	0.8	65	11	100	15.9	8.3	C3D1U705+B00C00***
8.0	32.0	28.0	14.0	27.5	--	0.8	65	11	100	13.9	9.5	C3D1U805+B00C00***
9.0	32.0	30.0	16.0	27.5	--	0.8	65	11	100	12.4	10.7	C3D1U905+B00C00***
10.0	32.0	30.0	16.0	27.5	--	0.8	65	11	100	11.1	11.8	C3D1U106+B00C00***
12.0	32.0	33.0	18.0	27.5	--	0.8	65	11	100	10.8	12.0	C3D1U126+B00C00***
12.0	32.0	33.0	18.0	27.5	10.2	0.8	65	11	100	9.3	14.2	C3D1U126+B0BC00***
15.0	32.0	37.0	22.0	27.5	--	0.8	65	11	100	9.0	12.0	C3D1U156+B00C00***
15.0	32.0	37.0	22.0	27.5	10.2	0.8	65	11	100	7.4	17.8	C3D1U156+B0BC00***
18.0	32.0	37.0	22.0	27.5	--	0.8	65	11	100	8.0	12.0	C3D1U186+B00C00***
18.0	32.0	37.0	22.0	27.5	12.7	0.8	65	11	100	6.2	21.3	C3D1U186+B02C00***
30.0	35.0	45.0	30.0	30.0	15.2	1.0	65	11	100	3.7	27.6	C3D1U306+C0DC00***
10.0	41.0	30.0	16.0	37.5	--	1.0	30	20	175	19.5	6.2	C3D1U106+F00C00***
12.0	41.0	30.0	16.0	37.5	--	1.0	30	20	175	16.3	7.4	C3D1U126+F00C00***
15.0	41.0	33.5	18.5	37.5	--	1.0	30	20	175	13.0	9.2	C3D1U156+F00C00***
20.0	42.0	40.0	20.0	37.5	10.2	1.0	30	20	175	9.8	12.3	C3D1U206+F0BC00***
22.0	42.0	40.0	20.0	37.5	10.2	1.0	30	20	175	8.9	13.5	C3D1U226+F0BC00***
25.0	42.0	40.0	20.0	37.5	12.7	1.0	30	20	175	7.8	15.4	C3D1U256+F02C00***
30.0	42.0	44.0	24.0	37.5	12.7	1.0	30	20	175	6.5	18.5	C3D1U306+F02C00***
35.0	42.0	45.0	30.0	37.5	12.7	1.2	30	20	175	6.0	20.1	C3D1U356+F02C00***
35.0	42.0	45.0	30.0	37.5	20.3	1.2	30	20	175	6.0	20.1	C3D1U356+F0AC00***
40.0	42.0	45.0	30.0	37.5	12.7	1.2	30	20	175	5.2	23.0	C3D1U406+F02C00***
40.0	42.0	45.0	30.0	37.5	20.3	1.2	30	20	175	5.2	23.0	C3D1U406+F0AC00***

■ 技术参数 Technical data(mm)

U _N , 70℃: 600 Vdc, U _N , 85℃: 500 Vdc												
C _N (μF)	W ± 1.0	H ± 1.0	T ± 1.0	P ± 0.5	b ± 0.5	d ± 0.05	dV/dt (V/μs)	tg δ × (10 ⁻⁴)		ESR (mΩ)	I _{rms} (A)	Part number
								1kHz	10kHz			
45.0	42.0	50.0	35.0	37.5	12.7	1.2	30	20	175	4.6	25.8	C3D1U456+F02C00***
45.0	42.0	50.0	35.0	37.5	20.3	1.2	30	20	175	4.6	25.8	C3D1U456+F0AC00***
50.0	42.0	50.0	35.0	37.5	20.3	1.2	30	20	175	4.2	28.7	C3D1U506+F0AC00***
55.0	42.0	50.0	35.0	37.5	20.3	1.2	30	20	175	3.8	31.6	C3D1U556+F0AC00***
60.0	42.0	55.0	40.0	37.5	20.3	1.2	30	20	175	3.5	34.5	C3D1U606+F0AC00***
65.0	42.0	55.0	40.0	37.5	20.3	1.2	30	20	175	3.2	37.3	C3D1U656+F0AC00***
70.0	42.0	55.0	40.0	37.5	20.3	1.2	30	20	175	3.0	40.2	C3D1U706+F0AC00***
75.0	42.0	60.0	45.0	37.5	20.3	1.2	30	20	175	2.8	43.1	C3D1U756+F0AC00***
80.0	42.0	60.0	45.0	37.5	20.3	1.2	30	20	175	2.6	45.9	C3D1U806+F0AC00***
85.0	42.0	60.0	45.0	37.5	20.3	1.2	30	20	175	2.5	48.8	C3D1U856+F0AC00***
40.0	57.0	45.0	25.0	52.5	12.7	1.2	15	36	350	9.8	12.3	C3D1U406+M02C00***
45.0	57.0	45.0	25.0	52.5	12.7	1.2	15	36	350	8.7	13.8	C3D1U456+M02C00***
50.0	57.0	45.0	25.0	52.5	12.7	1.2	15	36	350	7.8	15.4	C3D1U506+M02C00***
55.0	57.0	43.5	29.5	52.5	12.7	1.2	15	36	350	7.1	16.9	C3D1U556+M02C00***
55.0	57.0	43.5	29.5	52.5	20.3	1.2	15	36	350	7.1	16.9	C3D1U556+M0AC00***
60.0	57.0	43.5	29.5	52.5	12.7	1.2	15	36	350	6.5	18.5	C3D1U606+M02C00***
60.0	57.0	43.5	29.5	52.5	20.3	1.2	15	36	350	6.5	18.5	C3D1U606+M0AC00***
65.0	57.0	50.0	35.0	52.5	12.7	1.2	15	36	350	6.0	20.0	C3D1U656+M02C00***
65.0	57.0	50.0	35.0	52.5	20.3	1.2	15	36	350	6.0	20.0	C3D1U656+M0AC00***
70.0	57.0	50.0	35.0	52.5	20.3	1.2	15	36	350	5.6	21.5	C3D1U706+M0AC00***
75.0	57.0	50.0	35.0	52.5	20.3	1.2	15	36	350	5.2	23.1	C3D1U756+M0AC00***
80.0	57.0	50.0	35.0	52.5	20.3	1.2	15	36	350	4.9	24.6	C3D1U806+M0AC00***
85.0	57.0	55.0	45.0	52.5	20.3	1.2	15	36	350	4.8	25.1	C3D1U856+M0AC00***
90.0	57.0	55.0	45.0	52.5	20.3	1.2	15	36	350	4.6	25.8	C3D1U906+M0AC00***
95.0	57.0	55.0	45.0	52.5	20.3	1.2	15	36	350	4.4	27.3	C3D1U956+M0AC00***
100.0	57.0	55.0	45.0	52.5	20.3	1.2	15	36	350	4.2	28.7	C3D1U107+M0AC00***
110.0	57.0	55.0	45.0	52.5	20.3	1.2	15	36	350	3.8	31.6	C3D1U117+M0AC00***
120.0	57.0	65.0	45.0	52.5	20.3	1.2	15	36	350	3.5	34.5	C3D1U127+M0AC00***
130.0	57.0	65.0	45.0	52.5	20.3	1.2	15	36	350	3.2	37.3	C3D1U137+M0AC00***
140.0	57.0	65.0	45.0	52.5	20.3	1.2	15	36	350	3.0	40.2	C3D1U147+M0AC00***

U _N , 70℃: 800 Vdc, U _N , 85℃: 700 Vdc												
C _N (μF)	W ± 1.0	H ± 1.0	T ± 1.0	P ± 0.5	b ± 0.5	d ± 0.05	dV/dt (V/μs)	tg δ × (10 ⁻⁴)		ESR (mΩ)	I _{rms} (A)	Part number
								1kHz	10kHz			
2.0	32.0	18.0	9.0	27.5	--	0.8	65	10	95	45.4	2.9	C3D2K205+B00C00***
3.0	32.0	20.0	11.0	27.5	--	0.8	65	10	95	30.3	4.4	C3D2K305+B00C00***
3.3	32.0	30.0	16.0	27.5	--	0.8	65	10	95	18.8	7.0	C3D2K335+B00C00***
4.0	32.0	25.0	13.0	27.5	--	0.8	65	10	95	22.7	5.8	C3D2K405+B00C00***
5.0	32.0	24.5	15.0	27.5	--	0.8	65	10	95	18.2	7.3	C3D2K505+B00C00***
6.0	32.0	30.0	16.0	27.5	--	0.8	65	10	95	15.1	8.7	C3D2K605+B00C00***
7.0	32.0	30.0	16.0	27.5	--	0.8	65	10	95	13.0	10.2	C3D2K705+B00C00***
8.0	32.0	33.0	18.0	27.5	--	0.8	65	10	95	12.5	10.5	C3D2K805+B00C00***
8.0	32.0	33.0	18.0	27.5	10.2	0.8	65	10	95	11.3	11.6	C3D2K805+B0BC00***
9.0	32.0	33.0	18.0	27.5	--	0.8	65	10	95	11.1	11.8	C3D2K905+B00C00***
9.0	32.0	33.0	18.0	27.5	10.2	0.8	65	10	95	10.1	13.1	C3D2K905+B0BC00***
10.0	32.0	37.0	22.0	27.5	--	0.8	65	10	95	11.0	12.0	C3D2K106+B00C00***

■ 技术参数 Technical data(mm)

U _N , 70℃: 800 Vdc, U _N , 85℃: 700 Vdc												
C _N (μF)	W ± 1.0	H ± 1.0	T ± 1.0	P ± 0.5	b ± 0.5	d ± 0.05	dV/dt (V/μs)	tg δ × (10 ⁻⁴)		ESR (mΩ)	I _{rms} (A)	Part number
								1kHz	10kHz			
10.0	32.0	37.0	22.0	27.5	10.2	0.8	65	10	95	9.1	14.5	C3D2K106+B0BC00***
11.0	32.0	37.0	22.0	27.5	--	0.8	65	10	95	10.0	12.0	C3D2K116+B00C00***
11.0	32.0	37.0	22.0	27.5	10.2	0.8	65	10	95	8.3	16.0	C3D2K116+B0BC00***
12.0	32.0	37.0	22.0	27.5	--	0.8	65	10	95	9.3	12.0	C3D2K126+B00C00***
12.0	32.0	37.0	22.0	27.5	10.2	0.8	65	10	95	7.6	16.0	C3D2K126+B0BC00***
13.0	32.0	37.0	22.0	27.5	--	0.8	65	10	95	8.8	12.0	C3D2K136+B00C00***
13.0	32.0	37.0	22.0	27.5	12.7	0.8	65	10	95	8.1	16.2	C3D2K136+B02C00***
14.0	32.0	37.0	22.0	27.5	--	0.8	65	10	95	8.2	12.0	C3D2K146+B00C00***
14.0	32.0	37.0	22.0	27.5	12.7	0.8	65	10	95	7.6	17.5	C3D2K146+B02C00***
8.0	41.0	30.0	16.0	37.5	--	1.0	30	18	160	22.3	5.4	C3D2K805+F00C00***
9.0	41.0	30.0	16.0	37.5	--	1.0	30	18	160	19.8	6.1	C3D2K905+F00C00***
10.0	41.0	33.5	18.5	37.5	--	1.0	30	18	160	17.8	6.7	C3D2K106+F00C00***
12.0	41.0	33.5	18.5	37.5	--	1.0	30	18	160	14.9	8.1	C3D2K126+F00C00***
15.0	42.0	40.0	20.0	37.5	10.2	1.0	30	18	160	11.9	10.1	C3D2K156+F0BC00***
20.0	42.0	44.0	24.0	37.5	12.7	1.0	30	18	160	8.9	13.5	C3D2K206+F02C00***
25.0	42.0	44.0	24.0	37.5	12.7	1.0	30	18	160	7.1	16.8	C3D2K256+F02C00***
30.0	42.0	45.0	30.0	37.5	12.7	1.2	30	18	160	5.9	20.2	C3D2K306+F02C00***
30.0	42.0	45.0	30.0	37.5	20.3	1.2	30	18	160	5.9	20.2	C3D2K306+F0AC00***
35.0	42.0	50.0	35.0	37.5	20.3	1.2	30	18	160	5.5	22.0	C3D2K356+F0AC00***
40.0	42.0	50.0	35.0	37.5	20.3	1.2	30	18	160	4.8	25.1	C3D2K406+F0AC00***
45.0	42.0	55.0	40.0	37.5	20.3	1.2	30	18	160	4.2	28.3	C3D2K456+F0AC00***
50.0	42.0	55.0	40.0	37.5	20.3	1.2	30	18	160	3.8	31.4	C3D2K506+F0AC00***
55.0	42.0	60.0	45.0	37.5	20.3	1.2	30	18	160	3.5	34.5	C3D2K556+F0AC00***
60.0	42.0	60.0	45.0	37.5	20.3	1.2	30	18	160	3.2	37.7	C3D2K606+F0AC00***
65.0	42.0	60.0	45.0	37.5	20.3	1.2	30	18	160	2.9	40.8	C3D2K656+F0AC00***
25.0	57.0	45.0	25.0	52.5	12.7	1.2	15	33	320	14.3	8.4	C3D2K256+M02C00***
30.0	57.0	45.0	25.0	52.5	12.7	1.2	15	33	320	11.9	10.1	C3D2K306+M02C00***
35.0	57.0	45.0	25.0	52.5	12.7	1.2	15	33	320	10.2	11.8	C3D2K356+M02C00***
40.0	57.0	43.5	29.5	52.5	12.7	1.2	15	33	320	8.9	13.5	C3D2K406+M02C00***
40.0	57.0	43.5	29.5	52.5	20.3	1.2	15	33	320	8.9	13.5	C3D2K406+M0AC00***
45.0	57.0	43.5	29.5	52.5	12.7	1.2	15	33	320	7.9	15.1	C3D2K456+M02C00***
45.0	57.0	43.5	29.5	52.5	20.3	1.2	15	33	320	7.9	15.1	C3D2K456+M0AC00***
50.0	57.0	50.0	35.0	52.5	12.7	1.2	15	33	320	7.1	16.8	C3D2K506+M02C00***
50.0	57.0	50.0	35.0	52.5	20.3	1.2	15	33	320	7.1	16.8	C3D2K506+M0AC00***
55.0	57.0	50.0	35.0	52.5	20.3	1.2	15	33	320	6.5	18.5	C3D2K556+M0AC00***
60.0	57.0	50.0	35.0	52.5	20.3	1.2	15	33	320	5.9	20.2	C3D2K606+M0AC00***
65.0	57.0	55.0	45.0	52.5	20.3	1.2	15	33	320	5.5	21.9	C3D2K656+M0AC00***
70.0	57.0	55.0	45.0	52.5	20.3	1.2	15	33	320	5.1	23.6	C3D2K706+M0AC00***
75.0	57.0	55.0	45.0	52.5	20.3	1.2	15	33	320	4.8	25.2	C3D2K756+M0AC00***
80.0	57.0	55.0	45.0	52.5	20.3	1.2	15	33	320	4.6	25.9	C3D2K806+M0AC00***
85.0	57.0	55.0	45.0	52.5	20.3	1.2	15	33	320	4.5	26.7	C3D2K856+M0AC00***
90.0	57.0	55.0	45.0	52.5	20.3	1.2	15	33	320	4.2	28.3	C3D2K906+M0AC00***
95.0	57.0	65.0	45.0	52.5	20.3	1.2	15	33	320	4.0	29.8	C3D2K956+M0AC00***
100.0	57.0	65.0	45.0	52.5	20.3	1.2	15	33	320	3.8	31.4	C3D2K107+M0AC00***
110.0	57.0	65.0	45.0	52.5	20.3	1.2	15	33	320	3.5	34.5	C3D2K117+M0AC00***



C3D

Guang Zhou Nan Cai Electronic CO.,LTD.
<http://www.cgznc.com>

■ 技术参数 Technical data(mm)

U _N , 70℃: 900 Vdc, U _N , 85℃: 760 Vdc												
C _N (μF)	W ± 1.0	H ± 1.0	T ± 1.0	P ± 0.5	b ± 0.5	d ± 0.05	dV/dt (V/μs)	tg δ × (10 ⁻⁴)		ESR (mΩ)	I _{rms} (A)	Part number
								1kHz	10kHz			
1.0	32.0	18.0	9.0	27.5	--	0.8	70	9	90	86.0	1.5	C3D1X105+B00C00***
2.0	32.0	20.0	11.0	27.5	--	0.8	70	9	90	43.0	3.1	C3D1X205+B00C00***
3.0	32.0	22.0	13.0	27.5	--	0.8	70	9	90	28.7	4.6	C3D1X305+B00C00***
4.0	32.0	24.5	15.0	27.5	--	0.8	70	9	90	21.5	6.1	C3D1X405+B00C00***
5.0	32.0	30.0	16.0	27.5	--	0.8	70	9	90	17.2	7.7	C3D1X505+B00C00***
6.0	32.0	33.0	18.0	27.5	--	0.8	70	9	90	18.0	6.9	C3D1X605+B00C00***
6.0	32.0	33.0	18.0	27.5	10.2	0.8	70	9	90	14.3	9.2	C3D1X605+B0BC00***
7.0	32.0	33.0	18.0	27.5	--	0.8	70	9	90	13.0	10.2	C3D1X705+B00C00***
7.0	32.0	33.0	18.0	27.5	10.2	0.8	70	9	90	12.3	10.7	C3D1X705+B0BC00***
8.0	32.0	37.0	22.0	27.5	--	0.8	70	9	90	11.5	11.4	C3D1X805+B00C00***
8.0	32.0	37.0	22.0	27.5	10.2	0.8	70	9	90	10.7	12.3	C3D1X805+B0BC00***
9.0	32.0	37.0	22.0	27.5	--	0.8	70	9	90	10.4	12.0	C3D1X905+B00C00***
9.0	32.0	37.0	22.0	27.5	12.7	0.8	70	9	90	9.6	13.8	C3D1X905+B02C00***
10.0	32.0	37.0	22.0	27.5	--	0.8	70	9	90	12.0	12.2	C3D1X106+B00C00***
10.0	32.0	37.0	22.0	27.5	12.7	0.8	70	9	90	8.6	15.4	C3D1X106+B02C00***
4.7	41.0	26.0	15.0	37.5	--	1.0	35	17	150	35.6	3.4	C3D1X475+F00C00***
5.0	41.0	30.0	16.0	37.5	--	1.0	35	17	150	33.4	3.6	C3D1X505+F00C00***
6.0	41.0	30.0	16.0	37.5	--	1.0	35	17	150	27.9	4.3	C3D1X605+F00C00***
7.0	41.0	30.0	16.0	37.5	--	1.0	35	17	150	23.9	5.0	C3D1X705+F00C00***
8.0	41.0	33.0	18.0	37.5	--	1.0	35	17	150	20.9	5.7	C3D1X805+F00C00***
10.0	42.0	40.0	20.0	37.5	10.2	1.0	35	17	150	16.7	7.2	C3D1X106+F0BC00***
12.0	41.0	37.0	22.0	37.5	10.2	1.0	35	17	150	13.9	8.6	C3D1X126+F0BC00***
15.0	42.0	44.0	24.0	37.5	12.7	1.0	35	17	150	11.1	10.8	C3D1X156+F02C00***
18.0	42.0	44.0	24.0	37.5	12.7	1.0	35	17	150	9.3	12.9	C3D1X186+F02C00***
20.0	42.0	44.0	24.0	37.5	12.7	1.0	35	17	150	8.4	14.4	C3D1X206+F02C00***
25.0	42.0	45.0	30.0	37.5	12.7	1.2	35	17	150	6.7	17.9	C3D1X256+F02C00***
25.0	42.0	45.0	30.0	37.5	20.3	1.2	35	17	150	6.7	17.9	C3D1X256+F0AC00***
30.0	42.0	50.0	35.0	37.5	20.3	1.2	35	17	150	5.6	21.5	C3D1X306+F0AC00***
35.0	42.0	55.0	40.0	37.5	20.3	1.2	35	17	150	5.1	23.4	C3D1X356+F0AC00***
40.0	42.0	55.0	40.0	37.5	20.3	1.2	35	17	150	4.5	26.8	C3D1X406+F0AC00***
45.0	42.0	60.0	45.0	37.5	20.3	1.2	35	17	150	4.0	30.1	C3D1X456+F0AC00***
50.0	42.0	60.0	45.0	37.5	20.3	1.2	35	17	150	3.6	33.5	C3D1X506+F0AC00***
15.0	57.0	45.0	25.0	52.5	10.2	1.2	15	31	300	22.3	5.4	C3D1X156+M0BC00***
20.0	57.0	45.0	25.0	52.5	12.7	1.2	15	31	300	16.7	7.2	C3D1X206+M02C00***
25.0	57.0	45.0	25.0	52.5	12.7	1.2	15	31	300	13.4	9.0	C3D1X256+M02C00***
30.0	57.0	43.5	29.5	52.5	12.7	1.2	15	31	300	11.1	10.8	C3D1X306+M02C00***
30.0	57.0	43.5	29.5	52.5	20.3	1.2	15	31	300	11.1	10.8	C3D1X306+M0AC00***
35.0	57.0	43.5	29.5	52.5	12.7	1.2	15	31	300	9.6	12.6	C3D1X356+M02C00***
35.0	57.0	43.5	29.5	52.5	20.3	1.2	15	31	300	9.6	12.6	C3D1X356+M0AC00***
40.0	57.0	50.0	35.0	52.5	20.3	1.2	15	31	300	8.4	14.4	C3D1X406+M0AC00***
45.0	57.0	50.0	35.0	52.5	20.3	1.2	15	31	300	7.4	16.1	C3D1X456+M0AC00***
50.0	57.0	50.0	35.0	52.5	20.3	1.2	15	31	300	6.7	17.9	C3D1X506+M0AC00***
55.0	57.0	55.0	45.0	52.5	20.3	1.2	15	31	300	6.1	19.7	C3D1X556+M0AC00***
60.0	57.0	55.0	45.0	52.5	20.3	1.2	15	31	300	5.6	21.5	C3D1X606+M0AC00***
65.0	57.0	55.0	45.0	52.5	20.3	1.2	15	31	300	5.1	23.3	C3D1X656+M0AC00***

■ 技术参数 Technical data(mm)

U _N , 70°C: 900 Vdc, U _N , 85°C: 760 Vdc												
C _N (μF)	W ± 1.0	H ± 1.0	T ± 1.0	P ± 0.5	b ± 0.5	d ± 0.05	dV/dt (V/μs)	tg δ × (10 ⁻⁴)		ESR (mΩ)	I _{rms} (A)	Part number
								1kHz	10kHz			
70.0	57.0	65.0	45.0	52.5	20.3	1.2	15	31	300	4.8	25.1	C3D1X706+M0AC00***
75.0	57.0	65.0	45.0	52.5	20.3	1.2	15	31	300	4.7	25.7	C3D1X756+M0AC00***
80.0	57.0	65.0	45.0	52.5	20.3	1.2	15	31	300	4.5	26.8	C3D1X806+M0AC00***
85.0	57.0	65.0	45.0	52.5	20.3	1.2	15	31	300	4.2	28.5	C3D1X856+M0AC00***

U _N , 70℃: 1 000 Vdc, U _N , 85℃: 850 Vdc												
C _N (μF)	W ± 1.0	H ± 1.0	T ± 1.0	P ± 0.5	b ± 0.5	d ± 0.05	dV/dt (V/μs)	tg δ × (10 ⁻⁴)		ESR (mΩ)	I _{rms} (A)	Part number
								1kHz	10kHz			
1.0	32.0	18.0	9.0	27.5	--	0.8	75	8	80	76.4	1.7	C3D3A105+B00C00***
2.0	32.0	22.0	13.0	27.5	--	0.8	75	8	80	38.2	3.5	C3D3A205+B00C00***
3.0	32.0	24.5	15.0	27.5	--	0.8	75	8	80	25.5	5.2	C3D3A305+B00C00***
4.0	32.0	30.0	16.0	27.5	--	0.8	75	8	80	19.1	6.9	C3D3A405+B00C00***
5.0	32.0	33.0	18.0	27.5	--	0.8	75	8	80	15.3	8.6	C3D3A505+B00C00***
6.0	32.0	33.0	18.0	27.5	--	0.8	75	8	80	14.9	8.9	C3D3A605+B00C00***
6.0	32.0	33.0	18.0	27.5	10.2	0.8	75	8	80	13.7	9.6	C3D3A605+B0BC00***
7.0	32.0	37.0	22.0	27.5	--	0.8	75	8	80	14.5	9.4	C3D3A705+B00C00***
7.0	32.0	37.0	22.0	27.5	12.7	0.8	75	8	80	11.4	11.6	C3D3A705+B02C00***
8.0	32.0	37.0	22.0	27.5	--	0.8	75	8	80	13.0	10.8	C3D3A805+B00C00***
8.0	32.0	37.0	22.0	27.5	12.7	0.8	75	8	80	10.0	13.3	C3D3A805+B02C00***
5.0	41.0	30.0	16.0	37.5	--	1.0	37	15	140	31.2	3.8	C3D3A505+F00C00***
6.0	41.0	30.0	16.0	37.5	--	1.0	37	15	140	26.0	4.6	C3D3A605+F00C00***
7.0	41.0	33.0	18.0	37.5	--	1.0	37	15	140	22.3	5.4	C3D3A705+F00C00***
8.0	41.0	33.0	18.0	37.5	--	1.0	37	15	140	19.5	6.2	C3D3A805+F00C00***
10.0	42.0	40.0	20.0	37.5	10.2	1.0	37	15	140	15.6	7.7	C3D3A106+F0BC00***
12.0	41.0	37.0	22.0	37.5	12.7	1.0	37	15	140	13.0	9.2	C3D3A126+F02C00***
12.0	41.0	37.0	22.0	37.5	--	1.0	37	15	140	15.0	8.0	C3D3A126+F00C00***
15.0	42.0	44.0	24.0	37.5	12.7	1.0	37	15	140	10.4	11.5	C3D3A156+F02C00***
18.0	42.0	45.0	30.0	37.5	12.7	1.2	37	15	140	8.7	13.8	C3D3A186+F02C00***
18.0	42.0	45.0	30.0	37.5	20.3	1.2	37	15	140	8.7	13.8	C3D3A186+F0AC00***
20.0	42.0	45.0	30.0	37.5	12.7	1.2	37	15	140	7.8	15.4	C3D3A206+F02C00***
20.0	42.0	45.0	30.0	37.5	20.3	1.2	37	15	140	7.8	15.4	C3D3A206+F0AC00***
25.0	42.0	50.0	35.0	37.5	20.3	1.2	37	15	140	6.2	19.2	C3D3A256+F0AC00***
30.0	42.0	55.0	40.0	37.5	20.3	1.2	37	15	140	5.2	23.1	C3D3A306+F0AC00***
35.0	42.0	55.0	40.0	37.5	20.3	1.2	37	15	140	4.8	25.1	C3D3A356+F0AC00***
40.0	42.0	60.0	45.0	37.5	20.3	1.2	37	15	140	4.2	28.7	C3D3A406+F0AC00***
15.0	57.0	45.0	25.0	52.5	12.7	1.2	17	28	280	20.8	5.8	C3D3A156+M02C00***
20.0	57.0	45.0	25.0	52.5	12.7	1.2	17	28	280	15.6	7.7	C3D3A206+M02C00***
25.0	57.0	45.0	25.0	52.5	12.7	1.2	17	28	280	12.5	9.6	C3D3A256+M02C00***
30.0	57.0	43.5	29.5	52.5	12.7	1.2	17	28	280	10.4	11.5	C3D3A306KM02C00***
30.0	57.0	43.5	29.5	52.5	20.3	1.2	17	28	280	10.4	11.5	C3D3A306KM0AC00***
30.0	57.0	45.0	30.0	52.5	12.7	1.2	17	28	280	10.4	11.5	C3D3A306JM02C00***
30.0	57.0	45.0	30.0	52.5	20.3	1.2	17	28	280	10.4	11.5	C3D3A306JM0AC00***
35.0	57.0	50.0	35.0	52.5	20.3	1.2	17	28	280	8.9	13.5	C3D3A356+M0AC00***
40.0	57.0	50.0	35.0	52.5	20.3	1.2	17	28	280	7.8	15.4	C3D3A406+M0AC00***
45.0	57.0	55.0	45.0	52.5	20.3	1.2	17	28	280	6.9	17.3	C3D3A456+M0AC00***

■ 技术参数Technical data(mm)

U _N , 70℃: 1 000 Vdc, U _N , 85℃: 850 Vdc												
C _N (μF)	W ± 1.0	H ± 1.0	T ± 1.0	P ± 0.5	b ± 0.5	d ± 0.05	dV/dt (V/μs)	tg δ × (10 ⁻⁴)		ESR (mΩ)	I _{rms} (A)	Part number
								1kHz	10kHz			
50.0	57.0	55.0	45.0	52.5	20.3	1.2	17	28	280	6.2	19.2	C3D3A506+M0AC00***
55.0	57.0	55.0	45.0	52.5	20.3	1.2	17	28	280	5.7	21.1	C3D3A556+M0AC00***
60.0	57.0	65.0	45.0	52.5	20.3	1.2	17	28	280	5.2	23.1	C3D3A606+M0AC00***
65.0	57.0	65.0	45.0	52.5	20.3	1.2	17	28	280	4.8	25.0	C3D3A656+M0AC00***
70.0	57.0	65.0	45.0	52.5	20.3	1.2	17	28	280	4.5	26.9	C3D3A706+M0AC00***

U _N , 70℃: 1 100 Vdc, U _N , 85℃: 900 Vdc												
C _N (μF)	W ± 1.0	H ± 1.0	T ± 1.0	P ± 0.5	b ± 0.5	d ± 0.05	dV/dt (V/μs)	tg δ × (10 ⁻⁴)		ESR (mΩ)	I _{rms} (A)	Part number
								1kHz	10kHz			
0.68	32.0	20.0	11.0	27.5	--	0.8	80	8	70	80.0	1.7	C3D1M684+B00C00***
1.0	32.0	20.0	11.0	27.5	--	0.8	80	8	70	59.4	2.2	C3D1M105+B00C00***
1.5	32.0	22.0	13.0	27.5	--	0.8	80	8	70	55.7	2.4	C3D1M155+B00C00***
2.0	32.0	25.0	13.0	27.5	--	0.8	80	8	70	27.9	4.7	C3D1M205+B00C00***
3.0	32.0	30.0	16.0	27.5	--	0.8	80	8	70	20.4	6.5	C3D1M305+B00C00***
4.0	32.0	33.0	18.0	27.5	--	0.8	80	8	70	15.3	8.6	C3D1M405+B00C00***
5.0	32.0	37.0	22.0	27.5	--	0.8	80	8	70	14.0	9.8	C3D1M505+B00C00***
5.0	32.0	37.0	22.0	27.5	10.2	0.8	80	8	70	12.3	10.8	C3D1M505+B0BC00***
6.0	32.0	37.0	22.0	27.5	--	0.8	80	8	70	12.3	10.8	C3D1M605+B00C00***
6.0	32.0	37.0	22.0	27.5	10.2	0.8	80	8	70	10.2	12.9	C3D1M605+B0BC00***
3.0	41.0	30.0	16.0	37.5	--	1.0	40	15	130	48.3	2.5	C3D1M305+F00C00***
4.0	41.0	30.0	16.0	37.5	--	1.0	40	15	130	36.2	3.3	C3D1M405+F00C00***
4.7	41.0	33.5	18.5	37.5	10.2	1.0	40	15	130	30.8	3.9	C3D1M475+F0BC00***
5.0	41.0	33.5	18.5	37.5	--	1.0	40	15	130	29.0	4.1	C3D1M505+F00C00***
6.0	41.0	33.5	18.5	37.5	--	1.0	40	15	130	24.2	5.0	C3D1M605+F00C00***
7.0	42.0	40.0	20.0	37.5	10.2	1.0	40	15	130	20.7	5.8	C3D1M705+F0BC00***
8.0	41.0	37.0	22.0	37.5	10.2	1.0	40	15	130	18.1	6.6	C3D1M805+F0BC00***
9.0	41.0	37.0	22.0	37.5	12.7	1.0	40	15	130	16.1	7.5	C3D1M905+F02C00***
10.0	42.0	44.0	24.0	37.5	12.7	1.0	40	15	130	14.5	8.3	C3D1M106+F02C00***
12.0	42.0	44.0	24.0	37.5	12.7	1.0	40	15	130	12.1	9.9	C3D1M126+F02C00***
12.0	42.0	44.0	24.0	37.5	--	1.0	40	15	130	14.0	8.6	C3D1M126+F00C00***
15.0	42.0	45.0	30.0	37.5	12.7	1.2	40	15	130	9.7	12.4	C3D1M156+F02C00***
15.0	42.0	45.0	30.0	37.5	20.3	1.2	40	15	130	9.7	12.4	C3D1M156+F0AC00***
18.0	42.0	50.0	35.0	37.5	20.3	1.2	40	15	130	8.1	14.9	C3D1M186+F0AC00***
20.0	42.0	50.0	35.0	37.5	20.3	1.2	40	15	130	7.2	16.6	C3D1M206+F0AC00***
25.0	42.0	55.0	40.0	37.5	20.3	1.2	40	15	130	5.8	20.7	C3D1M256+F0AC00***
30.0	42.0	60.0	45.0	37.5	20.3	1.2	40	15	130	4.8	24.8	C3D1M306+F0AC00***
15.0	57.0	45.0	25.0	52.5	12.7	1.2	20	27	260	19.3	6.2	C3D1M156+M02C00***
20.0	57.0	43.5	29.5	52.5	12.7	1.2	20	27	260	14.5	8.3	C3D1M206+M02C00***
20.0	57.0	43.5	29.5	52.5	20.3	1.2	20	27	260	14.5	8.3	C3D1M206+M0AC00***
25.0	57.0	50.0	35.0	52.5	20.3	1.2	20	27	260	11.6	10.4	C3D1M256+M0AC00***
30.0	57.0	50.0	35.0	52.5	20.3	1.2	20	27	260	9.7	12.4	C3D1M306+M0AC00***
35.0	57.0	55.0	45.0	52.5	20.3	1.2	20	27	260	8.4	14.3	C3D1M356+M0AC00***
40.0	57.0	55.0	45.0	52.5	20.3	1.2	20	27	260	7.8	15.5	C3D1M406+M0AC00***



C3D

■ 技术参数 Technical data(mm)

U _{N, 70°C} : 1 100 Vdc, U _{N, 85°C} : 900 Vdc												
C _N (μF)	W ± 1.0	H ± 1.0	T ± 1.0	P ± 0.5	b ± 0.5	d ± 0.05	dV/dt (V/μs)	tg δ × (10 ⁻⁴)		ESR (mΩ)	I _{rms} (A)	Part number
								1kHz	10kHz			
45.0	57.0	55.0	45.0	52.5	20.3	1.2	20	27	260	6.9	17.4	C3D1M456+M0AC00***
50.0	57.0	65.0	45.0	52.5	20.3	1.2	20	27	260	6.2	19.3	C3D1M506+M0AC00***
55.0	57.0	65.0	45.0	52.5	20.3	1.2	20	27	260	5.6	21.3	C3D1M556+M0AC00***

U _N , 70°C: 1 200 Vdc, U _N , 85°C: 1 000 Vdc												
C _N (μF)	W ± 1.0	H ± 1.0	T ± 1.0	P ± 0.5	b ± 0.5	d ± 0.05	dV/dt (V/μs)	tg δ × (10 ⁻⁴)		ESR (mΩ)	I _{rms} (A)	Part number
								1kHz	10kHz			
1.0	32.0	20.0	11.0	27.5	--	0.8	90	7	55	52.5	2.5	C3D3L105+B00C00***
2.0	32.0	24.5	15.0	27.5	--	0.8	90	7	55	26.3	5.0	C3D3L205+B00C00***
3.0	32.0	30.0	16.0	27.5	--	0.8	90	7	55	17.5	7.5	C3D3L305+B00C00***
4.0	32.0	33.0	18.0	27.5	--	0.8	90	7	55	13.9	9.5	C3D3L405+B00C00***
5.0	32.0	37.0	22.0	27.5	--	0.8	90	7	55	12.7	10.4	C3D3L505+B00C00***
5.0	32.0	37.0	22.0	27.5	10.2	0.8	90	7	55	11.1	11.8	C3D3L505+B0BC00***
3.0	41.0	30.0	16.0	37.5	--	1.0	45	13	100	37.2	3.2	C3D3L305+F00C00***
4.0	41.0	30.0	16.0	37.5	--	1.0	45	13	100	27.9	4.3	C3D3L405+F00C00***
5.0	41.0	33.5	18.5	37.5	--	1.0	45	13	100	22.3	5.4	C3D3L505+F00C00***
6.0	42.0	40.0	20.0	37.5	--	1.0	45	13	100	18.6	6.5	C3D3L605+F00C00***
7.0	41.0	37.0	22.0	37.5	10.2	1.0	45	13	100	15.9	7.5	C3D3L705+F0BC00***
8.0	42.0	44.0	24.0	37.5	12.7	1.0	45	13	100	13.9	8.6	C3D3L805+F02C00***
9.0	42.0	44.0	24.0	37.5	12.7	1.0	45	13	100	12.4	9.7	C3D3L905+F02C00***
10.0	42.0	44.0	24.0	37.5	12.7	1.0	45	13	100	11.1	10.8	C3D3L106+F02C00***
12.0	42.0	45.0	30.0	37.5	12.7	1.2	45	13	100	9.3	12.9	C3D3L126+F02C00***
12.0	42.0	45.0	30.0	37.5	20.3	1.2	45	13	100	9.3	12.9	C3D3L126+F0AC00***
15.0	42.0	50.0	35.0	37.5	20.3	1.2	45	13	100	7.4	16.1	C3D3L156+F0AC00***
18.0	42.0	50.0	35.0	37.5	20.3	1.2	45	13	100	6.6	18.1	C3D3L186+F0AC00***
20.0	42.0	55.0	40.0	37.5	20.3	1.2	45	13	100	6.0	20.1	C3D3L206+F0AC00***
25.0	42.0	60.0	45.0	37.5	20.3	1.2	45	13	100	4.8	25.1	C3D3L256+F0AC00***
12.0	57.0	45.0	25.0	52.5	12.7	1.2	23	24	200	19.9	6.0	C3D3L126+M02C00***
15.0	57.0	45.0	25.0	52.5	12.7	1.2	23	24	200	15.9	7.5	C3D3L156+M02C00***
20.0	57.0	43.5	29.5	52.5	12.7	1.2	23	24	200	11.9	10.0	C3D3L206KM02C00***
20.0	57.0	43.5	29.5	52.5	20.3	1.2	23	24	200	11.9	10.0	C3D3L206KM0AC00***
20.0	57.0	45.0	30.0	52.5	12.7	1.2	23	24	200	11.9	10.0	C3D3L206JM02C00***
20.0	57.0	45.0	30.0	52.5	20.3	1.2	23	24	200	11.9	10.0	C3D3L206JM0AC00***
25.0	57.0	50.0	35.0	52.5	20.3	1.2	23	24	200	9.6	12.6	C3D3L256+M0AC00***
30.0	57.0	55.0	45.0	52.5	20.3	1.2	23	24	200	8.0	15.1	C3D3L306+M0AC00***
35.0	57.0	55.0	45.0	52.5	20.3	1.2	23	24	200	6.8	17.6	C3D3L356+M0AC00***
40.0	57.0	65.0	45.0	52.5	20.3	1.2	23	24	200	6.0	20.1	C3D3L406+M0AC00***
45.0	57.0	65.0	45.0	52.5	20.3	1.2	23	24	200	5.3	22.6	C3D3L456+M0AC00***

备注Note: 1. “+”表示容量偏差。 “+”=capacitance tolerance code M=±20%,K=±10%,J=±5%

2. “***”表示内部特征码。 “***”= Internal use

3. 当“b=10.0mm”时，第12位代码为“1”；当“b=20.0mm”时，第12位代码为“3”；当“b=15.0mm”时，第12位代码为“4”；
When the b=10.0mm, the digit 12 is “1”；When the b=20.0mm, the digit 12 is “3”；When the b=15.0mm, the digit 12 is “4”；

4. ESR值为f=10kHz下的典型值； Equivalent series resistance typical values at 10kHz；

5. 最大电流 I_{rms} 为f=10kHz, $T_{\text{amb}}=70^{\circ}\text{C}$, $\Delta T \leq 15.0^{\circ}\text{C}$ 的值。 Maximum rms current at 10kHz, $T_{\text{amb}}=70^{\circ}\text{C}$, $\Delta T \leq 15.0^{\circ}\text{C}$.