

Polypropylene (PP) Film and Foil Capacitors for Pulse Applications in PCM 2.5 mm

Special Features

- Pulse duty construction
- PCM 2.5 mm
- Close tolerances up to $\pm 2.5\%$
- Very low dissipation factor
- Negative capacitance change versus temperature
- Very low dielectric absorption
- According to RoHS 2011/65/EC

Typical Applications

For high frequency applications e.g.

- Sample and hold
- Timing
- LC-Filtering
- Oscillating circuits
- Audio equipment

Construction


Dielectric:

Polypropylene (PP) film

Capacitor electrodes:

Metal foil

Internal construction:

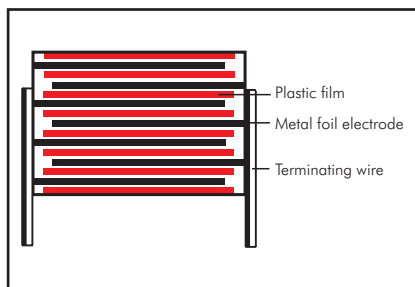

Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

Terminations:

Tinned wire.

Marking:

Colour: Red. Marking: Black.
Epoxy resin seal: Yellow

Electrical Data

Capacitance range:

100 pF to 0.01 μ F (E12-values on request)

Rated voltages:

63 VDC, 100 VDC, 250 VDC, 400 VDC

Capacitance tolerances:

$\pm 10\%$, $\pm 5\%$, $\pm 2.5\%$

Operating temperature range:

-55°C to $+100^{\circ}\text{C}$

Test specifications:

In accordance with IEC 60384-13

Climatic test category:

55/100/21 in accordance with IEC

Insulation resistance at $+20^{\circ}\text{C}$:

$\geq 5 \times 10^5 \text{ M}\Omega$

(mean value: $1 \times 10^6 \text{ M}\Omega$)

Measuring voltage:

$U_r = 63 \text{ V}$: $U_{\text{test}} = 50 \text{ V/1 min.}$

$U_r \geq 100 \text{ V}$: $U_{\text{test}} = 100 \text{ V/1 min.}$

Test voltage: $2 U_r$, 2 sec.

Maximum pulse rise time:

1000 V/ μ sec for pulses equal to the rated voltage

Dielectric absorption:

0.05%

Temperature coefficient:

$-200 \times 10^{-6}/^{\circ}\text{C}$ (typical)

Dissipation factors at $+20^{\circ}\text{C}$: $\tan \delta$

at f	$C \leq 0.01 \mu\text{F}$
1 kHz	$\leq 4 \times 10^{-4}$
10 kHz	$\leq 4 \times 10^{-4}$
100 kHz	$\leq 6 \times 10^{-4}$

Voltage derating:

A voltage derating factor of 1.35 % per K must be applied from $+85^{\circ}\text{C}$ for DC voltages and from $+75^{\circ}\text{C}$ for AC voltages.

Reliability:

Operational life > 300 000 hours

Failure rate < 5 fit ($0.5 \times U_r$ and 40°C)

Mechanical Tests

Pull test on pins:

10 N in direction of pins according to IEC 60068-2-21

Vibration:

6 hours at 10...2000 Hz and 0.75 mm displacement amplitude or 10 g in accordance with IEC 60068-2-6

Low air density:

1 kPa = 10 mbar in accordance with IEC 60068-2-13

Bump test:

4000 bumps at 390 m/sec² in accordance with IEC 60068-2-29

Packing

Available taped and reeled.

Detailed taping information and graphs at the end of the catalogue.

For further details and graphs please refer to Technical Information.

Continuation

General Data


Capacitance	63 VDC/40 VAC*					100 VDC/63 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
100 pF	2.5	7	4.6	2.5	FKPOC001000B00_____	2.5	7	4.6	2.5	FKPOD001000B00_____
150 "	2.5	7	4.6	2.5	FKPOC001500B00_____	2.5	7	4.6	2.5	FKPOD001500B00_____
220 "	2.5	7	4.6	2.5	FKPOC002200B00_____	2.5	7	4.6	2.5	FKPOD002200B00_____
330 "	2.5	7	4.6	2.5	FKPOC003300B00_____	2.5	7	4.6	2.5	FKPOD003300B00_____
470 "	2.5	7	4.6	2.5	FKPOC004700B00_____	2.5	7	4.6	2.5	FKPOD004700B00_____
680 "	2.5	7	4.6	2.5	FKPOC006800B00_____	2.5	7	4.6	2.5	FKPOD006800B00_____
1000 pF	2.5	7	4.6	2.5	FKPOC011000B00_____	2.5	7	4.6	2.5	FKPOD011000B00_____
1500 "	2.5	7	4.6	2.5	FKPOC011500B00_____	2.5	7	4.6	2.5	FKPOD011500B00_____
2200 "	3	7.5	4.6	2.5	FKPOC012200C00_____	3	7.5	4.6	2.5	FKPOD012200C00_____
3300 "	3.8	8.5	4.6	2.5	FKPOC013300D00_____	3.8	8.5	4.6	2.5	FKPOD013300D00_____
4700 "	4.6	9	4.6	2.5	FKPOC014700E00_____	4.6	9	4.6	2.5	FKPOD014700E00_____
6800 "	4.6	9	4.6	2.5	FKPOC016800E00_____	4.6	9	4.6	2.5	FKPOD016800E00_____
0.01 μF	5.5	10	4.6	2.5	FKPOC021000F00_____	5.5	10	4.6	2.5	FKPOD021000F00_____

Capacitance	250 VDC/160 VAC*					400 VDC/200 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
100 pF	2.5	7	4.6	2.5	FKPOF001000B00_____	2.5	7	4.6	2.5	FKPOG001000B00_____
150 "	2.5	7	4.6	2.5	FKPOF001500B00_____	2.5	7	4.6	2.5	FKPOG001500B00_____
220 "	2.5	7	4.6	2.5	FKPOF002200B00_____	2.5	7	4.6	2.5	FKPOG002200B00_____
330 "	2.5	7	4.6	2.5	FKPOF003300B00_____	2.5	7	4.6	2.5	FKPOG003300B00_____
470 "	2.5	7	4.6	2.5	FKPOF004700B00_____	2.5	7	4.6	2.5	FKPOG004700B00_____
680 "	2.5	7	4.6	2.5	FKPOF006800B00_____	3	7.5	4.6	2.5	FKPOG006800C00_____
1000 pF	2.5	7	4.6	2.5	FKPOF011000B00_____	3.8	8.5	4.6	2.5	FKPOG011000D00_____
1500 "	3	7.5	4.6	2.5	FKPOF011500C00_____	4.6	9	4.6	2.5	FKPOG011500E00_____
2200 "	3.8	8.5	4.6	2.5	FKPOF012200D00_____	4.6	9	4.6	2.5	FKPOG012200E00_____
3300 "	4.6	9	4.6	2.5	FKPOF013300E00_____	5.5	10	4.6	2.5	FKPOG013300F00_____
4700 "	5.5	10	4.6	2.5	FKPOF014700F00_____					


* AC voltage: $f \leq 400 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

** PCM = Printed circuit module = pin spacing

Dims. in mm.

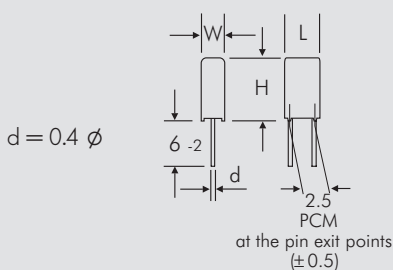

Part number completion:	
Tolerance:	10 % = K 5 % = J 2.5 % = H
Packing:	bulk = S
Pin length:	6-2 = SD
Taped version see page 148.	

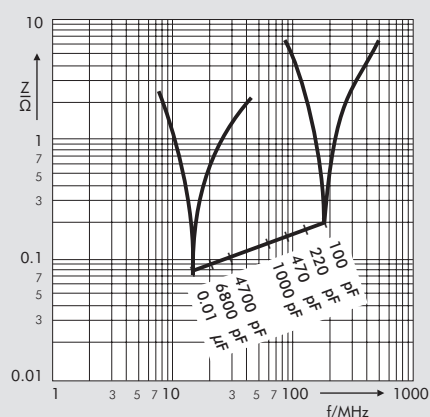

Impedance change with frequency
(general guide).

Recommendation for Processing and Application of Through-Hole Capacitors



Soldering Process

$T_{\max} < 100^{\circ}\text{C}$.

In practice a preheating duration of $t < 5$ min. has been proven to be best.

Single wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$


Immersion time: $t < 5$ sec

Double wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$

Immersion time: $2 \times t < 3$ sec

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

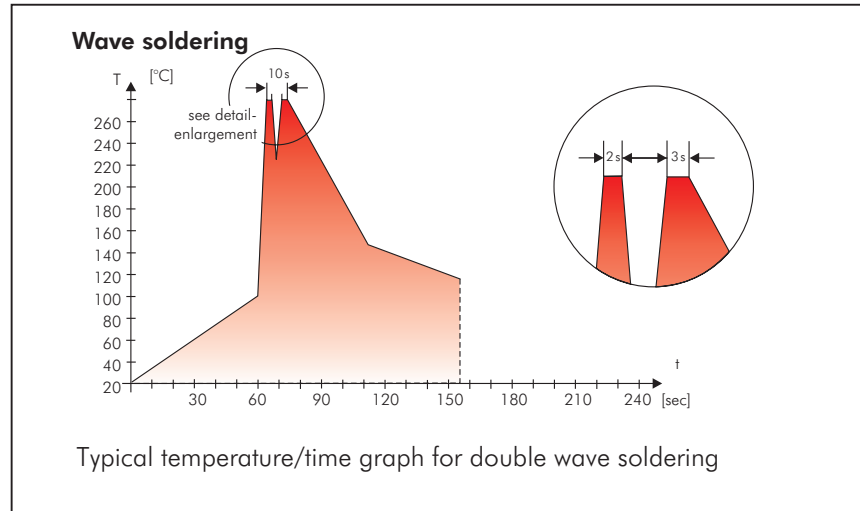

Typical Dimensions for Taping Configuration

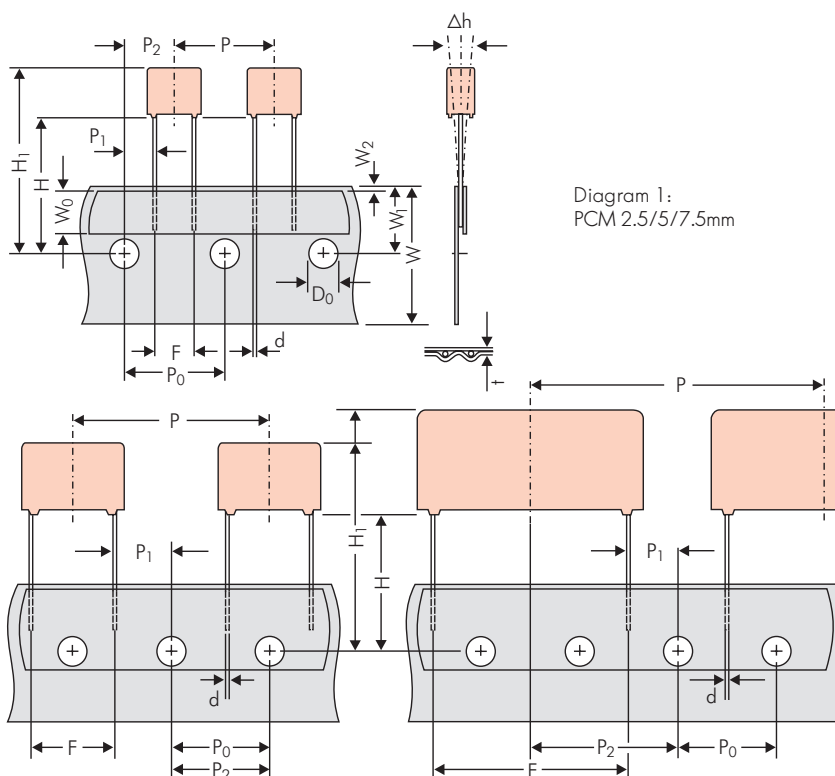


Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5*mm

*PCM 27.5 tapping possible with two feed holes between components

Designation	Symbol	Dimensions for Radial Taping						
		PCM 2.5 tapping	PCM 5 tapping	PCM 7.5 tapping	PCM 10 tapping*	PCM 15 tapping*	PCM 22.5 tapping	PCM 27.5 tapping
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5
Hold-down tape width	W ₀	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape
Hole position	W ₁	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5
Hold-down tape position	W ₂	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.
Feed hole diameter	D ₀	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	38.1 ±1.5 or 50.8 ±1.5
Feed hole pitch	P ₀	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch
Feed hole centre to pin	P ₁	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7
Hole centre to component centre	P ₂	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3
Feed hole centre to bottom edge of the component	H	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5
Feed hole centre to top edge of the component	H ₁	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 24.5 to 31.5	H+H _{component} < H ₁ 25.0 to 31.5	H+H _{component} < H ₁ 26.0 to 37.0	H+H _{component} < H ₁ 30.0 to 43.0	H+H _{component} < H ₁ 35.0 to 45.0
Pin spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 ^{+0.8} _{-0.2}	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8
Pin diameter	d	0.4 ±0.05	0.5 ±0.05	0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.
Total tape thickness	t	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2
Package (see also page 149)		ROLL/AMMO			AMMO			
		REEL ø 360 max. ø 30 ±1	B 52 ±2 58 ±2 } depending on comp. dimensions		REEL ø 360 max. ø 30 ±1	52 ±2 B 58 ±2 or 66 ±2	REEL ø 500 max. ø 25 ±1	54 ±2 B 60 ±2 68 ±2 } depending on PCM and component dimensions
Unit		see details page 150.						

Dims in mm.

* Diameter of pins see General Data.

Please clarify customer-specific deviations with the manufacturer.


* PCM 10 and PCM 15 can be crimped to PCM 7.5.

Position of components according to PCM 7.5 (sketch 11). P₀ = 12.7 or 15.0 is possible


Types of Tape Packaging of Capacitors for Automatic Radial Insertion




■ ROLL Packaging

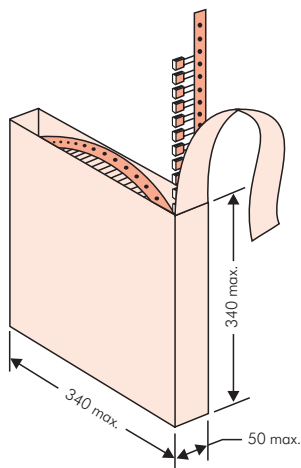

■ AMMO Packaging

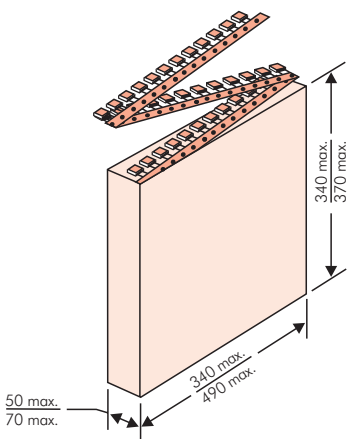

■ REEL Packaging

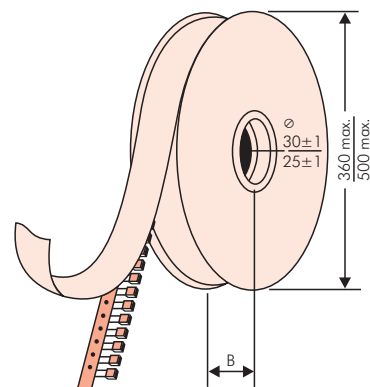

Guang Zhou Nan Cai Electronic CO.,LTD.
<http://www.cgznc.com>

Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm



PCM	Size				bulk	pcs. per packing unit									
						ROLL		REEL				AMMO			
	W	H	L	Codes		S	H16.5	H18.5	ø 360	ø 500	340 × 340	490 × 370			
						N	O	F	I	H	J	A	C	B	D
2.5 mm	2.5	7	4.6	0B	5000		2200		2500		–		2800		–
	3	7.5	4.6	0C	5000		2000		2300		–		2300		–
	3.8	8.5	4.6	0D	5000		1500		1800		–		1800		–
	4.6	9	4.6	0E	5000		1200		1500		–		1500		–
	5.5	10	4.6	0F	5000		900		1200		–		1200		–
5 mm	2.5	6.5	7.2	1A	5000		2200		2500		–		2800		–
	3	7.5	7.2	1B	5000		2000		2300		–		2300		–
	3.5	8.5	7.2	1C	5000		1600		2000		–		2000		–
	4.5	6	7.2	1D	6000		1300		1500		–		1500		–
	4.5	9.5	7.2	1E	4000		1300		1500		–		1500		–
	5	10	7.2	1F	3500		1100		1400		–		1400		–
	5.5	7	7.2	1G	4000		1000		1200		–		1200		–
	5.5	11.5	7.2	1H	2500		1000		1200		–		1200		–
	6.5	8	7.2	1I	2500		800		1000		–		1000		–
	7.2	8.5	7.2	1J	2500		700		1000		–		1000		–
	7.2	13	7.2	1K	2000		700		950		–		1000		–
	8.5	10	7.2	1L	2000		600		800		–		800		–
	8.5	14	7.2	1M	1500		600		800		–		800		–
	11	16	7.2	1N	1000		500		600		–		400		–
7.5 mm	2.5	7	10	2A	5000		–		2500		4400		2500		–
	3	8.5	10	2B	5000		–		2200		4300		2300		4150
	4	9	10	2C	4000		–		1700		3200		1700		3100
	4.5	9.5	10.3	2D	3500		–		1500		2900		1400		2800
	5	10.5	10.3	2E	3000		–		1300		2500		1300		–
	5.7	12.5	10.3	2F	2000		–		1000		2200		1100		–
	7.2	12.5	10.3	2G	1500		–		900		1800		1000		–
10 mm	3	9	13	3A	3000		–		1100		2200		–		1900
	4	8.5	13.5	FA	3000		–		900		1600		–		1450
	4	9	13	3C	3000		–		900		1600		–		1450
	4	9.5	13	3D	3000		–		900		1600		–		1400
	5	10	13.5	FB	2000		–		700		1300		–		1200
	5	11	13	3F	3000		–		700		1300		–		1200
	6	12	13	3G	2400		–		550		1100		–		1000
	6	12.5	13	3H	2400		–		550		1100		–		1000
8	12	13	3I	2000		–		400		800		–		740	
15 mm	5	11	18	4B	2400		–		600		1200		–		1150
	5	13	19	FC	1000		–		600		1200		–		1200
	6	12.5	18	4C	2000		–		500		1000		–		1000
	6	14	19	FD	1000		–		500		1000		–		1000
	7	14	18	4D	1600		–		450		900		–		850
	7	15	19	FE	1000		–		450		900		–		850
	8	15	18	4F	1200		–		400		800		–		740
	8	17	19	FF	500		–		400		800		–		740
	9	14	18	4H	1200		–		350		700		–		650
	9	16	18	4J	900		–		350		700		–		650
	10	18	19	FG	500		–		300		650		–		590
11	14	18	4M	1000		–		300		600		–		540	
22.5 mm	5	14	26.5	5A	1200		–		–		800		–		770
	6	15	26.5	5B	1000		–		–		700		–		640
	7	16.5	26.5	5D	760		–		–		600		–		550
	8	20	28	FH	500		–		–		500		–		480
	8.5	18.5	26.5	5F	500		–		–		480		–		450
	10	22	28	FI	540*		–		–		420		–		380
	10.5	19	26.5	5G	680*		–		–		400		–		360
	10.5	20.5	26.5	5H	680*		–		–		400		–		360
	11	21	26.5	5I	680*		–		–		380		–		350
	12	24	28	FJ	450*		–		–		350		–		310

* TPS (Tray-Packing-System). Plate versions may have different packing units.
Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.

Packing Quantities for Capacitors with Radial Pins in PCM 27.5 mm to 52.5 mm



PCM	Size				bulk	ROLL		pcs. per packing unit				AMMO			
								REEL							
	W	H	L	Codes		H16.5	H18.5	ø 360	ø 500	H16.5	H18.5	H16.5	H18.5	H16.5	H18.5
					S	N	O	F	I	H	J	A	C	B	D
27.5 mm	9	19	31.5	6A	640*	—	—	—	—	460/340*	—	—	—	420	—
	11	21	31.5	6B	544*	—	—	—	—	380/280*	—	—	—	350	—
	13	24	31.5	6D	448*	—	—	—	—	300	—	—	—	290	—
	13	25	33	FK	336*	—	—	—	—	—	—	—	—	—	—
	15	26	31.5	6F	384*	—	—	—	—	270	—	—	—	250	—
	15	26	33	FL	288*	—	—	—	—	—	—	—	—	—	—
	17	29	31.5	6G	176*	—	—	—	—	—	—	—	—	—	—
	17	34.5	31.5	6I	176*	—	—	—	—	—	—	—	—	—	—
	19	30	31.5	6L	50*	—	—	—	—	—	—	—	—	—	—
	20	32	33	FM	216*	—	—	—	—	—	—	—	—	—	—
	20	39.5	31.5	6J	144*	—	—	—	—	—	—	—	—	—	—
37.5 mm	9	19	41.5	7A	480*	—	—	—	—	—	—	—	—	—	—
	11	22	41.5	7B	408*	—	—	—	—	—	—	—	—	—	—
	13	24	41.5	7C	252*	—	—	—	—	—	—	—	—	—	—
	15	26	41.5	7D	144*	—	—	—	—	—	—	—	—	—	—
	17	29	41.5	7E	132*	—	—	—	—	—	—	—	—	—	—
	19	32	41.5	7F	108*	—	—	—	—	—	—	—	—	—	—
	20	39.5	41.5	7G	108*	—	—	—	—	—	—	—	—	—	—
	24	45.5	41.5	7H	84*	—	—	—	—	—	—	—	—	—	—
	31	46	41.5	7I	72*	—	—	—	—	—	—	—	—	—	—
	35	50	41.5	7J	35*	—	—	—	—	—	—	—	—	—	—
	40	55	41.5	7K	28*	—	—	—	—	—	—	—	—	—	—
48.5 mm	19	31	56	8D	50*	—	—	—	—	—	—	—	—	—	—
	23	34	56	8E	72*	—	—	—	—	—	—	—	—	—	—
	27	37.5	56	8H	60*	—	—	—	—	—	—	—	—	—	—
	33	48	56	8J	48*	—	—	—	—	—	—	—	—	—	—
	37	54	56	8L	25*	—	—	—	—	—	—	—	—	—	—
52.5 mm	35	50	57	9F	25*	—	—	—	—	—	—	—	—	—	—
	45	55	57	9H	20*	—	—	—	—	—	—	—	—	—	—
	45	65	57	9J	20*	—	—	—	—	—	—	—	—	—	—

* for 2-inch transport pitches.

* TPS (Tray-Packing-System). Plate versions may have different packing units.
Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.

Guang Zhou Nan Cai Electronic CO.,LTD.
<http://www.cgznc.com>

Field 1 - 4: Type description
Field 5 - 6: Rated voltage
Field 7 - 10: Capacitance
Field 11 - 12: Size and PCM
Field 13 - 14: Version code (e.g. Snubber versions)
Field 15: Capacitance tolerance
Field 16: Packing
Field 17 - 18: Lead length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
M	K	S	2	C	0	2	1	0	0	1	A	0	0	M	S	S	D
MKS 2				63 VDC		0.01 µF			2.5x6.5x7.2			-	20%	bulk	6 -2		
Type description:				Rated voltage:		Capacitance:			Size:			Tolerance:					
SMD-PET = SMDT				2.5 VDC = A1		22 pF = 0022			4.8x3.3x3 Size 1812 = KA			20% = M					
SMD-PPS = SMDI				4 VDC = A2		47 pF = 0047			4.8x3.3x4 Size 1812 = KB			10% = K					
FKP 02 = FKPO				14 VDC = A3		100 pF = 0100			5.7x5.1x3.5 Size 2220 = QA			5% = J					
MKS 02 = MKSO				28 VDC = A4		150 pF = 0150			5.7x5.1x4.5 Size 2220 = QB			2.5% = H					
FKS 2 = FKS2				40 VDC = A5		220 pF = 0220			7.2x6.1x3 Size 2824 = TA			1% = E					
FKP 2 = FKP2				5 VDC = A6		330 pF = 0330			7.2x6.1x5 Size 2824 = TB			...					
MKS 2 = MKS2				50 VDC = B0		470 pF = 0470			10.2x7.6x5 Size 4030 = VA								
MKP 2 = MKP2				63 VDC = C0		680 pF = 0680			12.7x10.2x6 Size 5040 = XA								
FKS 3 = FKS3				100 VDC = D0		1000 pF = 1100			15.3x13.7x7 Size 6054 = YA								
FKP 3 = FKP3				160 VDC = E0		1500 pF = 1150			2.5x7x4.6 PCM2.5 = 0B								
MKS 4 = MKS4				250 VDC = F0		2200 pF = 1220			3x7.5x4.6 PCM2.5 = 0C								
MKP 4 = MKP4				400 VDC = G0		3300 pF = 1330			2.5x6.5x7.2 PCM5 = 1A								
MKP 10 = MKP1				450 VDC = H0		4700 pF = 1470			3x7.5x7.2 PCM5 = 1B								
FKP 4 = FKP4				600 VDC = I0		6800 pF = 1680			2.5x7x10 PCM7.5 = 2A								
FKP 1 = FKP1				630 VDC = J0		0.01 µF = 2100			3x8.5x10 PCM7.5 = 2B								
MKP-X2 = MKX2				700 VDC = K0		0.022 µF = 2220			3x9x13 PCM10 = 3A								
MKP-X2 R = MKXR				800 VDC = L0		0.047 µF = 2470			4x9x13 PCM10 = 3C								
MKP-Y2 = MKY2				850 VDC = M0		0.1 µF = 3100			5x11x18 PCM15 = 4B								
MP 3-X2 = MPX2				900 VDC = N0		0.22 µF = 3220			6x12.5x18 PCM15 = 4C								
MP 3-X1 = MPX1				1000 VDC = O1		0.47 µF = 3470			5x14x26.5 PCM22.5 = 5A								
MP 3-Y2 = MPY2				1100 VDC = P0		1 µF = 4100			6x15x26.5 PCM22.5 = 5B								
MP 3R-Y2 = MPRY				1200 VDC = Q0		2.2 µF = 4220			9x19x31.5 PCM27.5 = 6A								
Snubber MKP = SNMP				1250 VDC = R0		4.7 µF = 4470			11x21x31.5 PCM27.5 = 6B								
Snubber FKP = SNFP				1500 VDC = S0		10 µF = 5100			9x19x41.5 PCM37.5 = 7A								
GTO MKP = GTOM				1600 VDC = T0		22 µF = 5220			11x22x41.5 PCM37.5 = 7B								
DC-LINK MKP 3 = DCP3				2000 VDC = U0		47 µF = 5470			94x49x182 DCH_ = H0								
DC-LINK MKP 4 = DCP4				2500 VDC = V0		100 µF = 6100			94x77x182 DCH_ = H1								
DC-LINK MKP 4S = DCPS				3000 VDC = W0		220 µF = 6220			...								
DC-LINK MKP 5 = DCP5				4000 VDC = X0		1 F = A010											
DC-LINK MKP 6 = DCP6				6000 VDC = Y0		2.5 F = A025											
DC-LINK HC = DCH_				250 VAC = 0W		50 F = A500			Version code:								
DC-LINK HY = DCHY				275 VAC = 1W		100 F = B100			Standard = 00			Lead length (untaped)					
SuperCap C = SCSC				300 VAC = 2W		110 F = B110			Version A1 = 1A			3.5 ±0.5 = C9					
SuperCap MC = MC__				400 VAC = 3W		600 F = B600			Version A1.1.1 = 1B			6 -2 = SD					
SuperCap C60 = SCSC				440 VAC = 4W		1200 F = C120			Version A2 = 2A			16 ±1 = P1					
SuperCap R = SCSR				500 VAC = 5W		...			...			...					
SuperCap MR = MRPP				...													